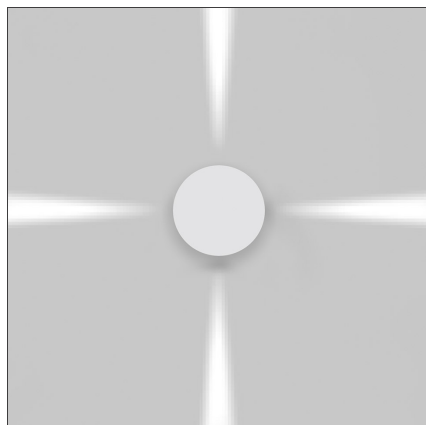


## Effetto Round 4 narrow beams Anthracite gray

IP65   

### DESIGN BY

Ernesto Gismondi

### DESCRIPTION

Light fixture with 2 light beams using monochromatic LED light sources characterized by warm colour temperature (3000K) together with light-diffusing lenses which optimize the optical performance of the beams and establish their width. Designed to create geometric lights of scenic effect, it has 2 narrow beams of 15°. Wall installation. Composed by lighting cap unit and terminal board fixed together by means of locking dowels. Cap in die-cast EN AB-47100 aluminium. Terminal board in reinforced polymer. Watertight gasket in silicone rubber. Locking dowels used outside the fixture in AISI 316 stainless steel. PMMA lenses siliconed flush with the cap to obtain the beam angle opening.

### FEATURES

|                      |                 |                       |   |
|----------------------|-----------------|-----------------------|---|
| <b>Article Code:</b> | T42104NW20      | <b>Material:</b>      | Aluminum, composite technopolymer, methacrylate |
| <b>Colour:</b>       | Anthracite gray | <b>Series:</b>        | Outdoor   |
| <b>Installation:</b> | Wall            | <b>Area contract:</b> | Urban, Outdoor, Residential                     |
| <b>Environment:</b>  | Outdoor         | <b>Emission:</b>      | Indirect  |

### DIMENSIONS

|               |       |                           |      |
|---------------|-------|---------------------------|------|
| <b>Width:</b> | cm 14 | <b>Impact Resistance:</b> | IK10 |
|               |       | <b>Glow Wire Test:</b>    | 650  |

### INCLUDED SOURCES

|                                      |       |                               |                |
|--------------------------------------|-------|-------------------------------|----------------|
| <b>Category:</b>                     | LED   | <b>Color temperature (K):</b> | 3000K          |
| <b>Number:</b>                       | 1     | <b>Color Tolerance:</b>       | 4SDCM          |
| <b>Watt:</b>                         | 11W   | <b>CRI:</b>                   | 80 typ         |
| <b>Delivered lumens output (lm):</b> | 714lm | <b>Efficacy:</b>              | 85lm/W         |
| <b>Type:</b>                         | 0     | <b>Service Life:</b>          | L70(14K)>81600 |
| <b>Class:</b>                        | A     |                               |                |

### LUMINAIRE

|                      |                       |                                      |          |
|----------------------|-----------------------|--------------------------------------|----------|
| <b>Power Supply:</b> | Electronic Integrated | <b>Delivered lumens output (lm):</b> | 76,1lm   |
| <b>Watt:</b>         | 11W                   | <b>CCT:</b>                          | 3000K    |
| <b>Voltage:</b>      | 220V-240V             | <b>Efficiency:</b>                   | 100%     |
|                      |                       | <b>Efficacy:</b>                     | 9.31lm/W |
|                      |                       | <b>CRI:</b>                          | 80       |

### Notes

Wiring to be carried out inside the terminal board by piercing an IP65 membrane grommet suitable for cables with a diameter of 6-13 mm. Painted die-cast aluminium with 3-stage outdoor treatment: nanotechnologies, antioxidant primer, polyester paint. Effective power 5,4W.

LIGHT DISTRIBUTION

