

Eggboard Matrix Direct 1600x800 Dali Dimmable 4000K



IP20  Dimmerable: 


DESIGN BY

Progetto CMR - Giacobone & Roj

DESCRIPTION

Suspension appliance with sound-absorbing properties ensured by a peculiar sinusoidal cross-section design of the lower surface and the use of a sound-absorbing material. Acoustic efficiency is ensured within a limited space by positioning at approximately one metre above the head of the speaker and listener. Direct emission: a board with a high number of low-voltage LEDs with rotosymmetrical reflectors ensures maximum lighting comfort. Colour temperature 3000K or 4000 K. Complies with the norms on office activities that involve the use of video-terminals (UGR)

TECHNICAL DRAWINGS

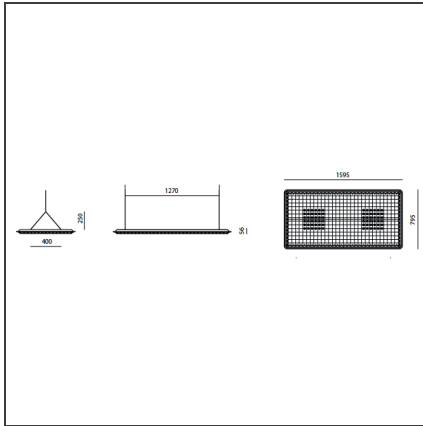

FEATURES

| | | | |
|----------------------|------------|----------------|--------|
| Article Code: | M3100N21 | Series: | Indoor |
| Colour: | White | | |
| Installation: | Suspension | | |

DIMENSIONS

| | |
|----------------|----------|
| Length: | cm 159.5 |
| Width: | cm 79.5 |
| Height: | cm 25 |
| Weight: | kg 16.6 |

INCLUDED SOURCES

| | | | |
|--------------------------------------|--------|-------------------------------|----------------|
| Category: | LED | Color temperature (K): | 4000K |
| Number: | 1 | Color Tolerance: | MacAdam 4SDCM |
| Watt: | 16W | CRI: | =80(min.) |
| Delivered lumens output (lm): | 2276lm | Efficacy: | 141lm/W |
| Type: | 0 | Service Life: | L70(6K)>50000h |
| Class: | A | | |

LUMINAIRE

| | | | |
|--------------|-----|--------------------------------------|-----------|
| Watt: | 31W | Delivered lumens output (lm): | 2626lm |
| | | CCT: | 4000K |
| | | Efficiency: | 71% |
| | | Efficacy: | 84.71lm/W |
| | | CRI: | 80 |