


# Grafa System Structural Module 1200x300 - linear - 3000K

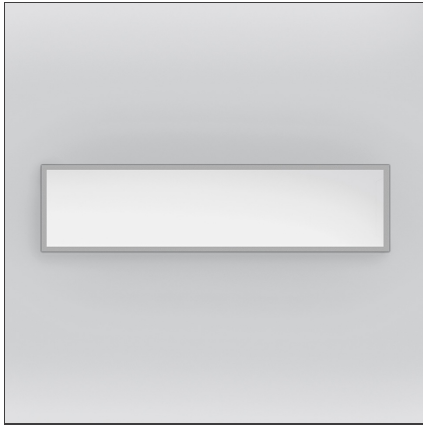

IP20  Dimmerable: 


## DESIGN BY

Wilmotte & Industries

## DESCRIPTION

Modular system with direct emission and indirect with LED high efficiency. Available in two colors: warm white (3000K), neutral white (4000K) - CRI = 85 (typ.). Installation with suspension. Single mounting, in continuous line by angle (90°), free composition. Dimmable electronic power supply Dali. Materials: structure in extruded aluminum anodized matte, top screen with anti-dust polycarbonate, staples in 6 different tones. Suspension cables in steel with quick adjustment. Complies with EN62471, EN60598-1 and other specific standards.

## TECHNICAL DRAWINGS

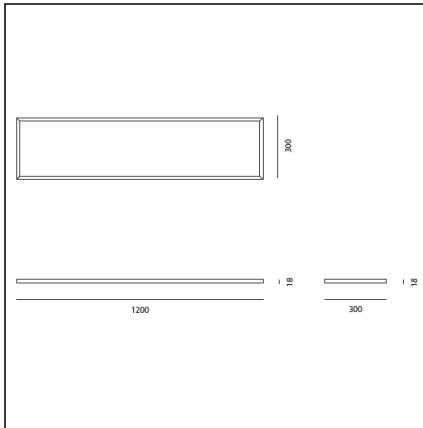

## FEATURES

<b>Article Code:</b>	M3001W61	<b>Series:</b>	Indoor
<b>Colour:</b>	Silver Grey		
<b>Installation:</b>	Suspension		

## DIMENSIONS

<b>Length:</b>	cm 120
<b>Width:</b>	cm 1.8
<b>Height:</b>	cm 30
<b>Weight:</b>	kg 4

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 4SDCM
<b>Watt:</b>	33W	<b>CRI:</b>	=80(typ.)
<b>Delivered lumens output (lm):</b>	3864lm	<b>Efficacy:</b>	119lm/W
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Watt:</b>	39W	<b>Delivered lumens output (lm):</b>	3207lm
		<b>CCT:</b>	3000K
		<b>Efficiency:</b>	83%
		<b>Efficacy:</b>	82.23lm/W
		<b>CRI:</b>	80