


Grafa System Structural Module 600x600 - linear - 3000K

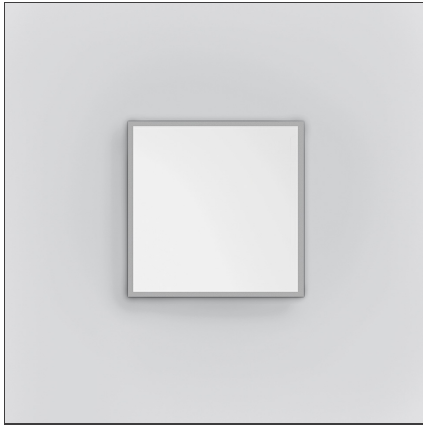

IP20  Dimmerable: 


DESIGN BY

Wilmotte & Industries

DESCRIPTION

Modular system with direct emission and indirect with LED high efficiency. Available in two colors: warm white (3000K), neutral white (4000K) - CRI = 85 (typ.). Installation with suspension. Single mounting, in continuous line by angle (90°), free composition. Dimmable electronic power supply Dali. Materials: structure in extruded aluminum anodized matte, top screen with anti-dust polycarbonate, staples in 6 different tones. Suspension cables in steel with quick adjustment. Complies with EN62471, EN60598-1 and other specific standards.

TECHNICAL DRAWINGS



FEATURES

Article Code:	M3003W61	Series:	Indoor
Colour:	Silver Grey		
Installation:	Suspension		

DIMENSIONS

Length:	cm 60
Width:	cm 1.8
Height:	cm 60
Weight:	kg 4

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	Color Tolerance:	MacAdam 4SDCM
Watt:	33W	CRI:	=80(typ.)
Delivered lumens output (lm):	3864lm	Efficacy:	119lm/W
Type:	0		
Class:	A		

LUMINAIRE

Watt:	39W	Delivered lumens output (lm):	3400lm
		CCT:	3000K
		Efficiency:	88%
		Efficacy:	87.19lm/W
		CRI:	80