

Ilio Rubin red 3000K



IP20    CE


DESIGN BY

Ernesto Gismondi

DESCRIPTION

With simple geometry, stripped of all formal digressions and reduced to its basics, Ilio draws attention through saturated colour, available in 7 variations. A mono-material aluminium cylinder supports a 39W LED optical engine on the top, which produces high-efficiency diffused indirect light emissions. With a flow of more than 2700 lumen and an 80% yield, it ensures the general lighting of a room. With light regulator configured to controlled socket, dimmer microswitch.

TECHNICAL DRAWINGS

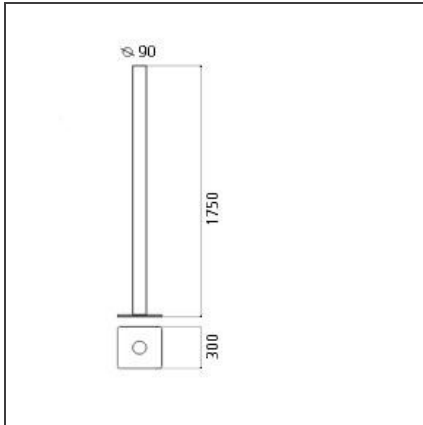

FEATURES

| | | | |
|----------------------|-----------|-----------------------|--------------------------------|
| Article Code: | 1640010A | Material: | Aluminium, steel |
| Colour: | Rubin red | Series: | Design |
| Installation: | Floor | Area contract: | Hospitality, null, Residential |
| Environment: | Indoor | Emission: | Indirect |

DIMENSIONS

| | | | |
|---------------------|--------|---------------------------|------|
| Height: | cm 175 | Impact Resistance: | N.D. |
| Base Length: | cm 300 | Glow Wire Test: | 750 |
| Base Width: | cm 300 | | |

INCLUDED SOURCES

| | | | |
|--------------------------------------|--------|-------------------------------|---------------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | Color Tolerance: | MacAdam 2SDCM |
| Watt: | 37W | CRI: | 90 |
| Delivered lumens output (lm): | 3899lm | Efficacy: | 107lm/W |
| Type: | 0 | Service Life: | 50000-L70 |
| Class: | A | | |

LUMINAIRE

| | | | |
|-----------------|----------|--------------------------------------|--------------------|
| Watt: | 45W | Delivered lumens output (lm): | 3564lm |
| Voltage: | 220-240V | CCT: | 3000K |
| | | Efficiency: | 88% |
| | | Efficacy: | 79.20lm/W |
| | | CRI: | 90 |
| | | Dimmer Typology: | Microswitch Dimmer |