




Ilio Rubin red 3000K - App Compatible



IP20   


DESIGN BY

Ernesto Gismondi

DESCRIPTION

With simple geometry, stripped of all formal digressions and reduced to its basics, Ilio draws attention through saturated colour, available in 7 variations. A mono-material aluminium cylinder supports a 39W LED optical engine on the top, which produces high-efficiency diffused indirect light emissions. With a flow of more than 2700 lumen and an 80% yield, it ensures the general lighting of a room. With light regulator configured to controlled socket, dimmer microswitch.

TECHNICAL DRAWINGS

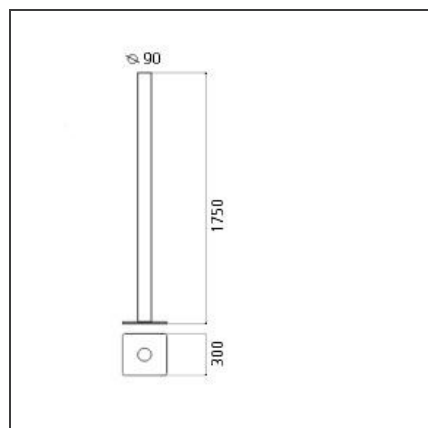

FEATURES

Article Code:	1640010APP	Material:	Aluminium, steel
Colour:	Rubin red	Series:	Design
Installation:	Floor	Area contract:	Hospitality, null, Residential
Environment:	Indoor	Emission:	Indirect

DIMENSIONS

Height:	cm 175	Impact Resistance:	N.D.
Base Length:	cm 30	Glow Wire Test:	750
Base Width:	cm 30		

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	Color Tolerance:	MacAdam 2SDCM
Watt:	37W	CRI:	90
Delivered lumens output (lm):	3899lm	Efficacy:	107lm/W
Type:	0	Service Life:	50000-L70
Class:	A		

LUMINAIRE

Watt:	45W	Delivered lumens output (lm):	3564lm
Voltage:	220-240V	CCT:	3000K
		Efficiency:	88%
		Efficacy:	79.20lm/W
		CRI:	90
		Dimmer Typology:	Microswitch Dimmer