

Lana



IP20  Dimmerable: 


DESIGN BY

Carlotta de Bevilacqua

DESCRIPTION

An innovative moulded clear polycarbonate optical unit allows to drive the flow emitted by the LED source towards the output section, thus generating broad luminous beams (2x35°) with very high yields (approximately 80%) and a mild light scattering effect. The special geometry of the reflector is made up of an external layer of 90° prisms reflecting light rays, while the micro-lenses on the inner surface provide for even distribution of light within the desired angles.

TECHNICAL DRAWINGS

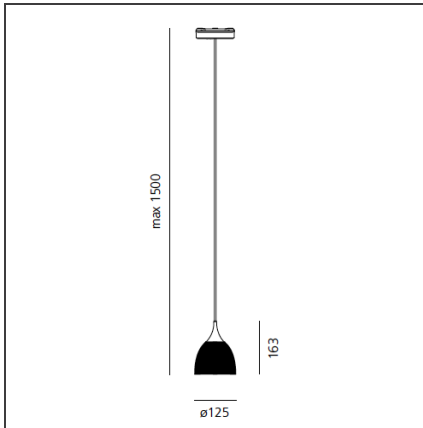

FEATURES

Article Code:	- - -	Material:	Methacrylate, polycarbonate
Colour:	Transparent/White	Series:	Scenarios
Installation:	Suspension		

DIMENSIONS

Height:	cm 16.3
Base Diameter:	cm 12.5
Max Height from ceiling:	cm 150

SOURCES NOT INCLUDED

Category:	LED	Color temperature (K):	3000K
Number:	1		
Watt:	6,8W		
Type:	2		
Socket:	GU10		
Class:	A		

LUMINAIRE

Watt:	6,8 W
--------------	-------