


## LineaLed 8W 3000K

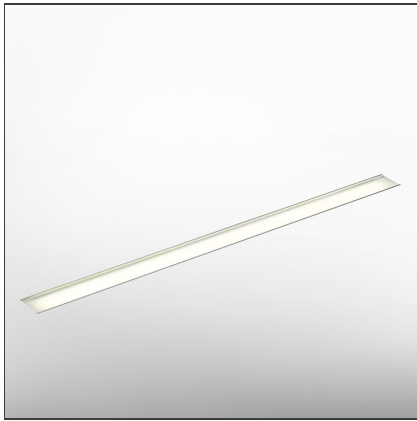

IP65/67  

### DESIGN BY

Carlotta de Bevilacqua

### DESCRIPTION

Light fixture with high-performance LED light sources.

Walk-over and drive-over recessed floor installation.

Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection. Floor recessing box in steel.


Body in extruded EN AW6060 T5 aluminium.

End caps in injection-moulded polycarbonate with silicone gasket. 8mm-thick opal non-slip tempered glass.

Technical features of light fixtures in compliance with EN60598-1.

Installation must be carried out by specialized personnel. Carefully follow the instructions.

### TECHNICAL DRAWINGS

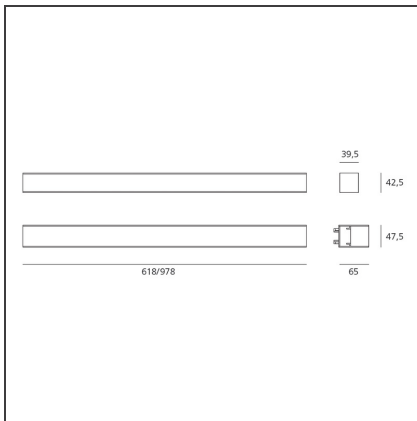

### FEATURES

<b>Article Code:</b>	NL7419VSK0	<b>Series:</b>	Outdoor
<b>Installation:</b>	Recessed	<b>Area contract:</b>	Urban

### DIMENSIONS

<b>Length:</b>	cm 97.8
<b>Width:</b>	cm 4.7
<b>Height:</b>	cm 9

### INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Voltage:</b>	24 Vdc
<b>Watt:</b>	8W		
<b>Delivered lumens output (lm):</b>	432		
<b>Type:</b>	0		
<b>Class:</b>	A		

### LUMINAIRE

<b>Power Supply:</b>	Electronic remote ballast	<b>Delivered lumens output (lm):</b>	206lm
<b>Watt:</b>	8W	<b>CCT:</b>	3000K
<b>Voltage:</b>	24Vdc	<b>CRI:</b>	75

### Notes

Electrical connection to the ballast by means of 100cm-long two-pole cable H05RN-F, with IP67 quick-release terminal block which is supplied with the fixture and can be housed in the recessing box.

Connect a maximum number of 10 fixtures in a continuous line.

**ACCESSORIES**



Housing L=982mm  
NL76700



Housing end cap  
(pair) - 46,5 x 62,5  
x 1,5mm  
NL76750



Female power  
connector for  
discontinuous  
connection  
NL19023



Male power  
connector for  
discontinuous  
connection  
NL19021



ALIMENT. 40W  
24Vdc IP67  
NL62040



CONNETTORE  
ALIMENTAZIONE +  
TAPPO  
NL19052



ALIMENT. 70W  
24Vdc IP67  
NL89080



ALIMENT. 150W  
24Vdc IP67  
NL62880



LINEALED STAFFA  
GIUNZIONE  
C/CASSA  
NL75810