

# LineaLed Wallwasher 8,5W - 12° 3000K



IP65/67  

## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

Walk-over and drive-over recessed floor installation. Composed by body in extruded aluminium, protection glass; provided with junction box for input/output connection. Body fastened to the recessing box by means of proper pre-stressed steel springs supplied with the fixture.


24Vdc remote ballast.

Connect a maximum number of 2 fixtures in a continuous line.

Technical features of light fixtures in compliance with EN60598-1.

Installation must be carried out by specialized personnel. Carefully follow the instructions.

## TECHNICAL DRAWINGS

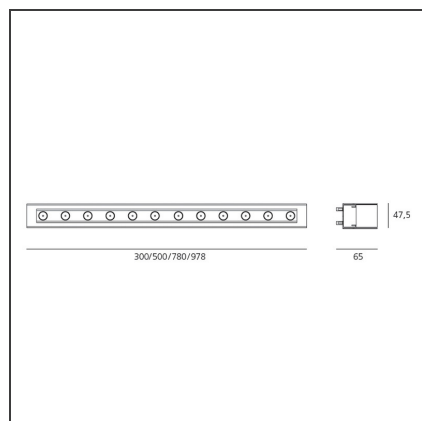

## FEATURES

|                      |             |                       |  |
|----------------------|-------------|-----------------------|--|
| <b>Article Code:</b> | NL1732010K0 | <b>Material:</b>      | Aluminium, transparent tempered glass. |
| <b>Colour:</b>       | Silver gray | <b>Series:</b>        | Outdoor                                |
| <b>Installation:</b> | Recessed    | <b>Area contract:</b> | Outdoor                                |

## DIMENSIONS

|                |        |                           |      |
|----------------|--------|---------------------------|------|
| <b>Length:</b> | cm 30  | <b>Impact Resistance:</b> | IK07 |
| <b>Width:</b>  | cm 4,8 |                           |      |
| <b>Height:</b> | cm 6,5 |                           |      |

## INCLUDED SOURCES

|                                      |        |                               |       |
|--------------------------------------|--------|-------------------------------|-------|
| <b>Category:</b>                     | LED    | <b>Color temperature (K):</b> | 3000K |
| <b>Number:</b>                       | 1      | <b>Voltage:</b>               | 24Vdc |
| <b>Watt:</b>                         | 8,5W   |                               |       |
| <b>Delivered lumens output (lm):</b> | 1776lm |                               |       |
| <b>Type:</b>                         | 0      |                               |       |
| <b>Class:</b>                        | A      |                               |       |

## LUMINAIRE

|                      |            |                                      |       |
|----------------------|------------|--------------------------------------|-------|
| <b>Power Supply:</b> | Electronic | <b>Delivered lumens output (lm):</b> | 416lm |
| <b>Watt:</b>         | 8,5W       | <b>CCT:</b>                          | 3000K |
| <b>Voltage:</b>      | 24 Vdc     | <b>CRI:</b>                          | 80    |

## Notes

**Spot optic** (10° optic)

Concentrated luminous flow to highlight details avoiding unwanted light dispersion.

**ACCESSORIES**

NO  
IMAGE  
AVAILABLE

Housing end cap  
(pair) - 46,5 x 62,5  
x 1,5mm  
NL76750

NO  
IMAGE  
AVAILABLE

Female power  
connector for  
discontinuos  
connection  
NL19023

NO  
IMAGE  
AVAILABLE

Male power  
connector for  
discontinuos  
connection  
NL19021

NO  
IMAGE  
AVAILABLE

Housing L=982mm  
NL76700

NO  
IMAGE  
AVAILABLE

Cassaforma  
L=300mm  
NL76740

NO  
IMAGE  
AVAILABLE

Cassaforma  
L=500mm  
NL76730

NO  
IMAGE  
AVAILABLE

Cassaforma  
L=780mm  
NL76710

NO  
IMAGE  
AVAILABLE

ALIMENT. 40W  
24Vdc IP67  
NL62040

NO  
IMAGE  
AVAILABLE

CONNETTORE  
ALIMENTAZIONE +  
TAPPO  
NL19052

NO  
IMAGE  
AVAILABLE

ALIMENT. 70W  
24Vdc IP67  
NL89080

NO  
IMAGE  
AVAILABLE

ALIMENT. 150W  
24Vdc IP67  
NL62880



LINEALED STAFFA  
GIUNZIONE  
C/CASSA  
NL75810