

# LineaLed WW Adjustable 25W - 12° 3000K



IP65/67  

## DESIGN BY

Carlotta de Bevilacqua


## DESCRIPTION

Light fixture with high-performance LED light sources.  
 Walk-over and drive-over recessed floor installation.  
 Monochromatic light.  
 Composed by body in extruded aluminium, protection glass.  
 Adjustment brackets in die-cast aluminium.  
 Electrical connection to the ballast by means of 100cm-long two-pole cable H05RN-F, with IP67 quick-release terminal board supplied with the fixture.  
 Polycarbonate end caps with silicone gasket. 8mm-thick non-slip transparent tempered glass.  
 24Vdc remote ballast.

Technical features of light fixtures in compliance with EN60598-1.

Installation must be carried out by specialized personnel. Carefully follow the instructions.

## TECHNICAL DRAWINGS

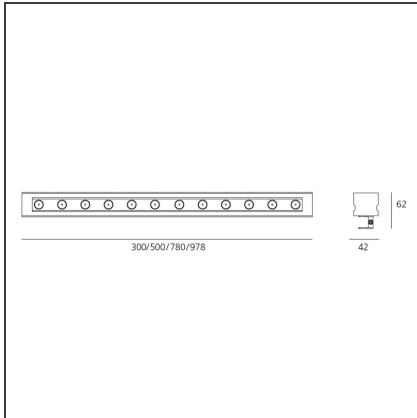

## FEATURES

<b>Article Code:</b>	NL1733210K0	<b>Material:</b>	Aluminium, transparent tempered glass.
<b>Colour:</b>	Silver gray	<b>Series:</b>	Outdoor
<b>Installation:</b>	Recessed	<b>Area contract:</b>	Outdoor

## DIMENSIONS

<b>Length:</b>	cm 78	<b>Impact Resistance:</b>	IK07
<b>Width:</b>	cm 4.2		
<b>Height:</b>	cm 6.2		
<b>Weight:</b>	kg 2.2		

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	3	<b>Voltage:</b>	24Vdc
<b>Watt:</b>	8,5W		
<b>Delivered lumens output (lm):</b>	1776lm		
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	Remote electronic	<b>Delivered lumens output (lm):</b>	1248lm
<b>Watt:</b>	25W	<b>CCT:</b>	3000K
<b>Voltage:</b>	24Vdc	<b>CRI:</b>	80

## Notes

Spot optic Concentrated luminous flow to highlight details avoiding unwanted light dispersion.(10° optic)

**ACCESSORIES**

---

NO  
IMAGE  
AVAILABLE

ALIMENT. 40W  
24Vdc IP67  
NL62040

NO  
IMAGE  
AVAILABLE

ALIMENT. 70W  
24Vdc IP67  
NL89080

NO  
IMAGE  
AVAILABLE

ALIMENT. 150W  
24Vdc IP67  
NL62880