

# LineaLed WW Adjustable 8,5W - 28° 3000K



IP65/67  

## DESIGN BY

Carlotta de Bevilacqua


## DESCRIPTION

Light fixture with high-performance LED light sources.  
Walk-over and drive-over recessed floor installation.  
Monochromatic light.  
Composed by body in extruded aluminium, protection glass.  
Adjustment brackets in die-cast aluminium.  
Electrical connection to the ballast by means of 100cm-long two-pole cable H05RN-F, with IP67 quick-release terminal board supplied with the fixture.  
Polycarbonate end caps with silicone gasket. 8mm-thick non-slip transparent tempered glass.  
24Vdc remote ballast.

Technical features of light fixtures in compliance with EN60598-1.

Installation must be carried out by specialized personnel. Carefully follow the instructions.

## TECHNICAL DRAWINGS

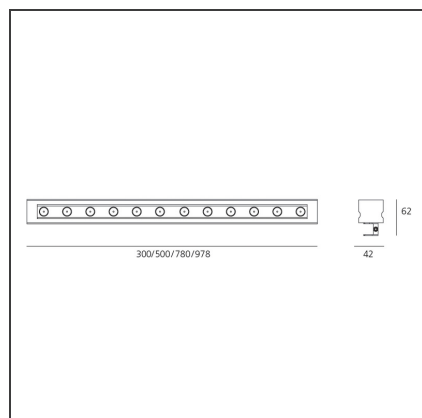

## FEATURES

|                      |             |                       |  |
|----------------------|-------------|-----------------------|--|
| <b>Article Code:</b> | NL1733025K0 | <b>Material:</b>      | Aluminium, transparent tempered glass. |
| <b>Colour:</b>       | Silver gray | <b>Series:</b>        | Outdoor                                |
| <b>Installation:</b> | Recessed    | <b>Area contract:</b> | Outdoor                                |

## DIMENSIONS

|                |        |                           |      |
|----------------|--------|---------------------------|------|
| <b>Length:</b> | cm 30  | <b>Impact Resistance:</b> | IK07 |
| <b>Width:</b>  | cm 4.2 |                           |      |
| <b>Height:</b> | cm 6.2 |                           |      |
| <b>Weight:</b> | kg 0.9 |                           |      |

## INCLUDED SOURCES

|                                      |        |                               |       |
|--------------------------------------|--------|-------------------------------|-------|
| <b>Category:</b>                     | LED    | <b>Color temperature (K):</b> | 3000K |
| <b>Number:</b>                       | 1      | <b>Voltage:</b>               | 24Vdc |
| <b>Watt:</b>                         | 8,5W   |                               |       |
| <b>Delivered lumens output (lm):</b> | 1776lm |                               |       |
| <b>Type:</b>                         | 0      |                               |       |
| <b>Class:</b>                        | A      |                               |       |

## LUMINAIRE

|                      |                   |                                      |       |
|----------------------|-------------------|--------------------------------------|-------|
| <b>Power Supply:</b> | Remote electronic | <b>Delivered lumens output (lm):</b> | 411lm |
| <b>Watt:</b>         | 8,5W              | <b>CCT:</b>                          | 3000K |
| <b>Voltage:</b>      | 24Vdc             | <b>CRI:</b>                          | 80    |

## Notes

### Medium optic

Medium luminous flux to highlight details, large sections of windows. (25° optic)

ACCESSORIES



ALIMENT. 40W  
24Vdc IP67  
NL62040



ALIMENT. 70W  
24Vdc IP67  
NL89080



ALIMENT. 150W  
24Vdc IP67  
NL62880