

Pantarei 300 LED Polycarbonate IK10 Black



IP65     


DESIGN BY

Ernesto Gismondi

DESCRIPTION

Phospho-cromated die-cast aluminium structure, painted with polyester for maximum resistance to oxidation; inox-steel screws and bolts in silicone rubber. Diffuser in shock resistant opal polycarbonate.

TECHNICAL DRAWINGS

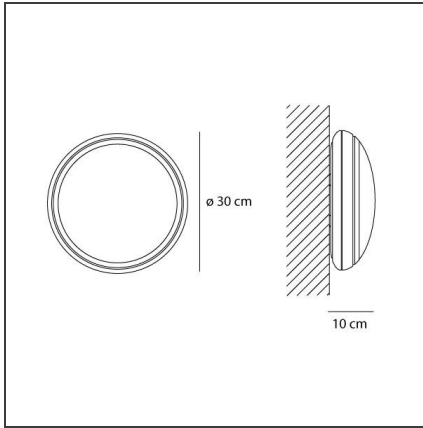

FEATURES

| | | | |
|----------------------|---------------|------------------|-----------------------------|
| Article Code: | T2779530 | Material: | Aluminum, sandblasted glass |
| Colour: | Black | Series: | Outdoor |
| Installation: | Wall, Ceiling | Emission: | Diffused |
| Environment: | Indoor | | |

DIMENSIONS

| | | | |
|----------------|-------|---------------------------|------|
| Height: | cm 10 | Impact Resistance: | IK10 |
| | | Glow Wire Test: | 850 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | CRI: | 80 |
| Watt: | 14W | | |
| Type: | 0 | | |
| Class: | A | | |

LUMINAIRE

| | | | |
|-----------------|-----------|--------------------------------------|-------|
| Watt: | 14W | Delivered lumens output (lm): | 658lm |
| Voltage: | 220V-240V | CCT: | 3000K |
| | | CRI: | 80 |