


# Parabola100\_Square\_17W\_2700K\_50°\_Silver

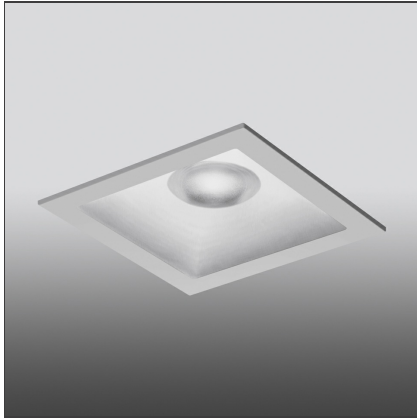

IP40  Dimmerable: 


## DESIGN BY

Studio Artemide

## DESCRIPTION

• Light fixture with high-performance LED light sources. • Ceiling installation. • Composed by: frame, body, lens, fixing springs. • Frame in injection mould of aluminium. • Heat sink body in extruded aluminium. • Lens in polycarbonate with 3 different versions of beam. • Fixing springs in harmonic steel. • White monochromatic LEDs available in 3 colours temperatures: Very Warm = 2700K Warm = 3000K Neutral = 4000K • Electrical connection to the driver by means of a FEP-FEP cable and a terminal board. • IP Rating IP40. • Insulation class III. • Technical features of light fixtures in compliance with EN60598-1. • Installation must be carried out by specialized personnel. • Carefully follow the instructions.

## TECHNICAL DRAWINGS

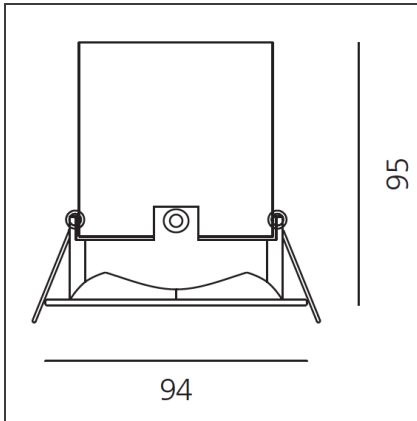

## FEATURES

<b>Article Code:</b>	NL1907340Y002	<b>Material:</b>	Aluminium
<b>Colour:</b>	Silver	<b>Series:</b>	Indoor
<b>Installation:</b>	Recessed, Ceiling	<b>Area contract:</b>	Hospitality, null, Retail, Office, Culture, Residential
<b>Environment:</b>	Indoor		

## DIMENSIONS

<b>Weight:</b>	kg 0.5
<b>Base Length:</b>	cm 9.4
<b>Base Width:</b>	cm 9.4
<b>Recessed depth:</b>	cm 9.5

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	2700K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 3SDCM
<b>Watt:</b>	17W	<b>CRI:</b>	=90 (min.)
<b>Delivered lumens output (lm):</b>	2012lm	<b>Efficacy:</b>	118lm/W
<b>Type:</b>	0	<b>Service Life:</b>	L70(6K) > 60000h
<b>Class:</b>	A		

## LUMINAIRE

<b>Watt:</b>	17W	<b>Delivered lumens output (lm):</b>	1378lm
		<b>CCT:</b>	2700K
		<b>CRI:</b>	90

**ACCESSORIES**

NO  
IMAGE  
AVAILABLE

Driver cc 32W  
700mA DALI  
dimmable  
M079200

NO  
IMAGE  
AVAILABLE

DRIVER cc 32W  
700mA 220-240  
103 67 21 1max 1-  
10V, push  
M079300

NO  
IMAGE  
AVAILABLE

DRIVER cc 20W  
5000mA 220-240  
125 38 23 1max  
Non dimmable  
M077600