

Parabola80_Adjustable round_12W_76°_2700K_Black



IP40 


DESIGN BY

Studio Artemide

DESCRIPTION

Light fixture with high-performance LED light sources, consists of: frame, body, lens, fixing springs. Frame in injection mould of aluminium. Heat sink body in extruded aluminium. Lens in polycarbonate with 3 different versions of beam. Fixing springs in harmonic steel. Electrical connection to the driver by means of a FEP-FEP cable and a terminal board. Technical features of light fixtures in compliance with EN60598-1.

TECHNICAL DRAWINGS

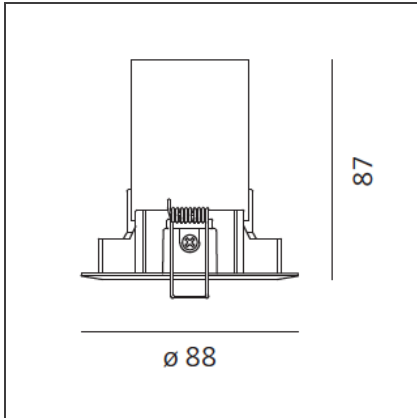

FEATURES

| | | | |
|----------------------|-------------------|-----------------------|---|
| Article Code: | NL1906480Y004 | Material: | Aluminium |
| Colour: | Black | Series: | Indoor |
| Installation: | Recessed, Ceiling | Area contract: | Hospitality, null, Retail, Office, Culture, Residential |
| Environment: | Indoor | | |

DIMENSIONS

| | | | |
|------------------------|--------|-------------------------|---------|
| Weight: | kg 0.3 | Cutout diameter: | cm 7.8 |
| Inclination: | -20+20 | Cutout shape: | Rounded |
| Recessed depth: | cm 8.7 | | |

INCLUDED SOURCES

| | | | |
|--------------------------------------|--------|-------------------------------|----------------|
| Category: | LED | Color temperature (K): | 2700K |
| Number: | 1 | Color Tolerance: | 3SDCM |
| Watt: | 12W | CRI: | 90 |
| Delivered lumens output (lm): | 1447lm | Efficacy: | 121lm/W |
| Type: | 0 | Service Life: | L70(6K)>60000h |
| Class: | A | | |

LUMINAIRE

| | | | |
|----------------------|---|--------------------------------------|-------|
| Power Supply: | Driver 350 mA SELV supplied separately. | Delivered lumens output (lm): | 987lm |
| Watt: | 12W | CCT: | 2700K |
| | | CRI: | 90 |

ACCESSORIES

NO
IMAGE
AVAILABLE

ALIMENTATORE
16.8W
350/500/700MA
DALI
NL104210

NO
IMAGE
AVAILABLE

DRIVER cc 15W
350mA 220-240
125 38 23 1max
Non dimmable
M077500