


# Parabola80\_square\_12W\_52°\_3000K\_Black

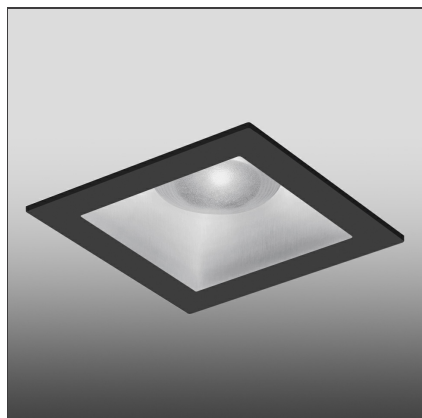

IP40


## DESIGN BY

Studio Artemide

## DESCRIPTION

Light fixture with high-performance LED light sources, consists of: frame, body, lens, fixing springs. Frame in injection mould of aluminium. Heat sink body in extruded aluminium. Lens in polycarbonate with 3 different versions of beam. Fixing springs in harmonic steel. Electrical connection to the driver by means of a FEP-FEP cable and a terminal board. Technical features of light fixtures in compliance with EN60598-1.

## TECHNICAL DRAWINGS

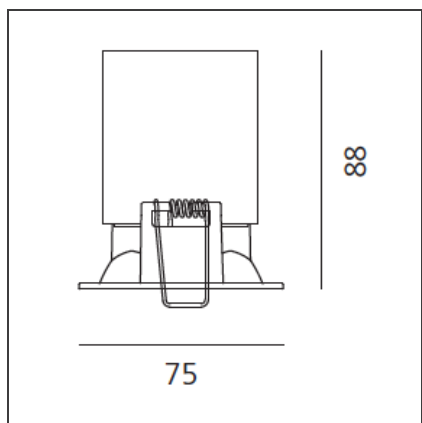

## FEATURES

<b>Article Code:</b>	NL1907140K004	<b>Material:</b>	Aluminium
<b>Colour:</b>	Black	<b>Series:</b>	Indoor
<b>Installation:</b>	Recessed, Ceiling	<b>Area contract:</b>	Hospitality, null, Retail, Office, Culture, Residential
<b>Environment:</b>	Indoor		

## DIMENSIONS

<b>Length:</b>	cm 7.5	<b>Cutout Width:</b>	cm 6.2
<b>Width:</b>	cm 7.5	<b>Cutout length:</b>	cm 6.5
<b>Weight:</b>	kg 0.3	<b>Cutout shape:</b>	Squared
<b>Recessed depth:</b>	cm 8.8		

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	3SDCM
<b>Watt:</b>	12W	<b>CRI:</b>	90
<b>Delivered lumens output (lm):</b>	1512lm	<b>Efficacy:</b>	126lm/W
<b>Type:</b>	0	<b>Service Life:</b>	L70(6K)>60000h
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	Driver 350 mA SELV supplied separately.	<b>Delivered lumens output (lm):</b>	1019lm
<b>Watt:</b>	12W	<b>CCT:</b>	3000K
		<b>Efficiency:</b>	76%
		<b>Efficacy:</b>	84 lm/W

**ACCESSORIES**

NO  
IMAGE  
AVAILABLE

ALIMENTATORE  
16.8W  
350/500/700MA  
DALI  
NL104210

NO  
IMAGE  
AVAILABLE

DRIVER cc 15W  
350mA 220-240  
125 38 23 1max  
Non dimmable  
M077500