

Piroscafo Grey



IP65 


DESIGN BY

Ernesto Gismondi

DESCRIPTION

Lighting appliance for ground fixing with radial bidirectional light emission, using monochrome LED light sources. The appliance is made up of a body and a fixing base of EN-AB 47100 die-cast aluminium finished with a 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester painting. Equipped with a furukawa reflector Shiny shock-resistant anti-UV polycarbonate screen AISI 316 fixing screws and silicon seals. Sealing degree IP65. Class I provided with cable and IP67 connector for connection to the mains. Supports cables with 7 to 12 mm diameters. Technical specifications comply with the EN60598-1 norm. CE registration

TECHNICAL DRAWINGS

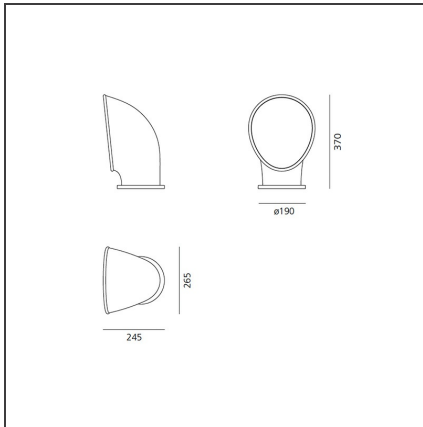

FEATURES

Article Code:	T081900	Material:	Aluminum, tempered glass
Colour:	Grey	Series:	Outdoor
Installation:	Floor		

DIMENSIONS

Length:	cm 19.8
Width:	cm 17
Height:	cm 27.5

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1		
Watt:	14W		
Type:	0		
Class:	A		

LUMINAIRE

Watt:	14W	Delivered lumens output (lm):	1143lm
		CCT:	3000K
		CRI:	80