

# Sharp SMD - 11W 34° 2700K White



IP20  


## DESIGN BY

Carlotta de Bevilacqua

## DESCRIPTION

High-efficiency patented optical system that combines polynomial perspective to an element that shields geometrically the angle of vision of the beam. High uniformity of illumination and full emission control. Complete absence of possible light flaws as stains and multi-shadows. Recessed depth 60 mm. Suitable for a ceiling of 1 to 25 mm. Available in trim versions, trimless and SMD.

## TECHNICAL DRAWINGS

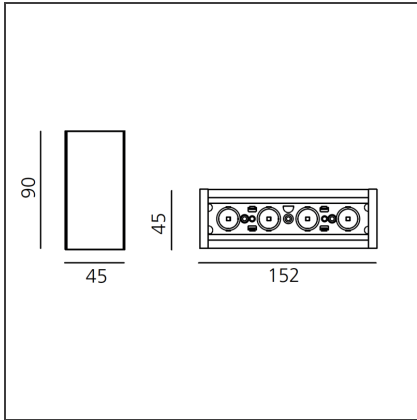

## FEATURES

<b>Article Code:</b>	AF41101	<b>Series:</b>	Indoor
<b>Colour:</b>	White		
<b>Installation:</b>	Ceiling		
<b>Environment:</b>	Indoor		

## DIMENSIONS

<b>Length:</b>	cm 15.2
<b>Width:</b>	cm 4,5
<b>Height:</b>	cm 9

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	2700K
<b>Number:</b>	1		
<b>Watt:</b>	11W		
<b>Type:</b>	0		
<b>Class:</b>	A		

## LUMINAIRE

<b>Watt:</b>	11W	<b>Delivered lumens output (lm):</b>	706lm
		<b>CCT:</b>	2700K
		<b>CRI:</b>	>90

## Notes

Screen and CV SELV driver supplied separately.

**ACCESSORIES**

NO  
IMAGE  
AVAILABLE

Driver CV 30W  
24Vdc Selv - 220-  
240 Vac -  
153x41x32  
(LxWxH) - up to  
25W -  
Undimmable  
DV1032



Screen 4x White  
AF95201



Screen 4x Black  
AF95204

NO  
IMAGE  
AVAILABLE

Driver CV 75W  
24Vdc Selv - 220-  
240 Vac -  
180x52x30  
(LxWxH) - up to  
65W -  
Undimmable  
DV1009

NO  
IMAGE  
AVAILABLE

Sharping wall  
grazer lens Kit  
(4pcs) - 26°x70°  
elliptical lenses kit.  
It has to be used  
on top of S 20°  
reflectors to get  
an elliptical beam  
(greter axis along  
the module  
length). It contains  
4 lenses.  
AF06000

NO  
IMAGE  
AVAILABLE

Driver CV 120W  
24Vdc Selv - 220-  
240 Vac -  
153x41x32  
(LxWxH) - up to  
100W -  
Undimmable  
DV1033