

## Sostituto Spot flood 24°



IP65 


### DESIGN BY

Ernesto Gismondi

### DESCRIPTION

Light fixture with direct emission, with monochromatic LED light sources. Floor, wall, eaves installation. Consists of lighting unit, wiring terminal board and fixing plate. Rotation on the base +/-10°, body tilting +/-90. Positioning is maintained by means of locking dowels. EN AB47100 aluminium body and terminal board, silicone gaskets. Electronic ballast integrated in the body. Polycarbonate diffuser silicone-sealed to the lens supporting unit. Composed by 3 interchangeable optical units. IP67 connector for the electrical connection to the mains, which can be located in the base compartment and is suitable for 5-13.5mm diameter cables. LED circuits with PMMA lenses in 3 beam versions: 5°, 11,5° and elliptical 12x20°. All the screws used outside the product are in AISI 316 stainless steel. All the components in die-cast aluminium are painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Technical features of the lighting fixtures in compliance with EN60598-1 and section 2-5. IP Rating IP66. Protection level from 4KV impulse overvoltage. Insulation class II.

### TECHNICAL DRAWINGS

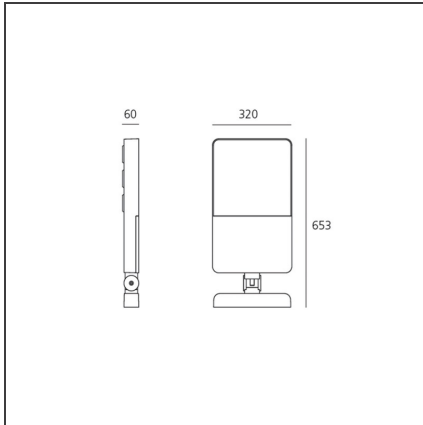

### FEATURES

<b>Article Code:</b>	T418423W00	<b>Material:</b>	Aluminum, polycarbonate, methacrilate
<b>Colour:</b>	Grey antracite	<b>Series:</b>	Outdoor
<b>Installation:</b>	Projector, Floor		

### DIMENSIONS

<b>Length:</b>	cm 32	<b>Impact Resistance:</b>	IK10
<b>Width:</b>	cm 6	<b>Glow Wire Test:</b>	750
<b>Height:</b>	cm 65.3		

### INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	3000K
<b>Number:</b>	1	<b>CRI:</b>	80
<b>Watt:</b>	106W		
<b>Type:</b>	0		
<b>Class:</b>	A		

### LUMINAIRE

<b>Watt:</b>	106W	<b>Delivered lumens output (lm):</b>	9276lm
<b>Voltage:</b>	220V-240V	<b>CCT:</b>	3000K
		<b>CRI:</b>	80