


Tagora Incasso 80 - Led 3000K - 52° - Orange

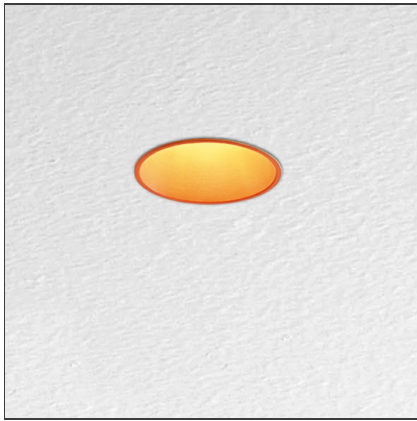

IP20 Dimmerable:


DESIGN BY

S./R. Cornelissen

DESCRIPTION

Series of ceiling mounted luminaires available in 4 diameters (80 mm, 270 mm, 570 mm, 970 mm), using high-output LEDs, Retrofit LEDs. □Consists of a trimless recessed frame fitted into the ceiling and an optical unit with an aluminium body painted in a range of colours: beige/white, grey/white, black/orange, black/vert and black/blue. □Tagora 80 and 270 offer a high-output spot light with aluminium optics. □Tagora 270 uses a proprietary system based on a hybrid combined lens and reflector optic. This system helps to create defined narrow beams using high-powered LED modules of large dimensions. □Tagora 570 and 970 come with a PMMA diffuser, offering a comfortable diffused light. LED versions use high-output sources. □Integrated electronic power supply, dimmable or non-dimmable options, depending on the version. Only ceiling recessed installation allowed. □Compliant with standard EN60598-1 and other specific standards.

TECHNICAL DRAWINGS

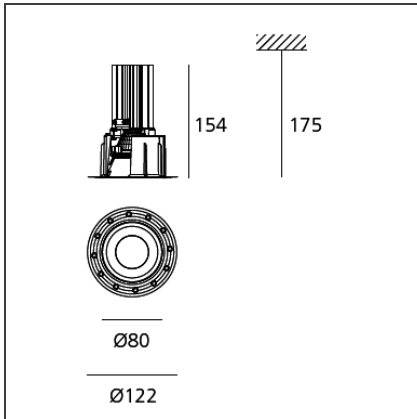

FEATURES

| | | | |
|----------------------|----------|------------------|-----------|
| Article Code: | AB00316 | Material: | Aluminium |
| Colour: | Orange | Series: | Indoor |
| Installation: | Recessed | | |

DIMENSIONS

| | | | |
|------------------------|---------|-------------------------|---------|
| Height: | cm 15.4 | Cutout diameter: | cm 9.2 |
| Weight: | kg 0.3 | Cutout shape: | Rounded |
| Recessed depth: | cm 17.5 | Glow Wire Test: | 960 |

INCLUDED SOURCES

| | | | |
|------------------|-----|-------------------------------|-----------------|
| Category: | LED | Color temperature (K): | 3000K |
| Number: | 1 | Color Tolerance: | MacAdam 3SDCM |
| Watt: | 14W | CRI: | 90 |
| Type: | 0 | Service Life: | L70 (6K) 60000h |
| Class: | A | | |

LUMINAIRE

| | | | |
|----------------------------------|----------------------------------|--------------------------------------|-----------|
| Power Supply: | Power supply supplied separately | Delivered lumens output (lm): | 1015lm |
| Transformer availability: | Remote | CCT: | 3000K |
| Watt: | 14W | Efficiency: | 68% |
| Voltage: | 220V-240V | Efficacy: | 72.54lm/W |
| | | CRI: | 90 |

ACCESSORIES



DRIVER cc 16W
350mA 220-240
156 52 26 1max
DALI
dimmable/Push
dali
M077401