




# Tagora Recessed 80 LED - 4000K - 52° - Blue

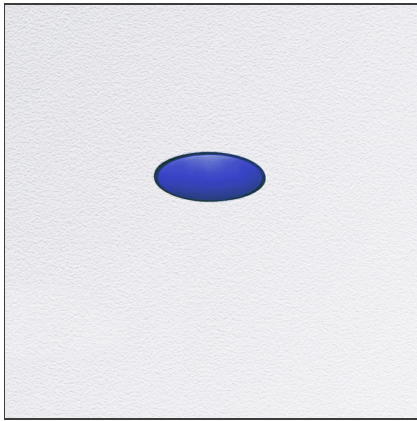

IP20   Dimmerable: 


## DESIGN BY

S./R. Cornelissen

## DESCRIPTION

Series of ceiling mounted luminaires available in 4 diameters (80 mm, 270 mm, 570 mm, 970 mm), using high-output LEDs, Retrofit LEDs. □Consists of a trimless recessed frame fitted into the ceiling and an optical unit with an aluminium body painted in a range of colours: beige/white, grey/white, black/orange, black/vert and black/blue. □Tagora 80 and 270 offer a high-output spot light with aluminium optics. □Tagora 270 uses a proprietary system based on a hybrid combined lens and reflector optic. This system helps to create defined narrow beams using high-powered LED modules of large dimensions. □Tagora 570 and 970 come with a PMMA diffuser, offering a comfortable diffused light. LED versions use high-output sources. □Integrated electronic power supply, dimmable or non-dimmable options, depending on the version. Only ceiling recessed installation allowed. □Compliant with standard EN60598-1 and other specific standards.

## TECHNICAL DRAWINGS

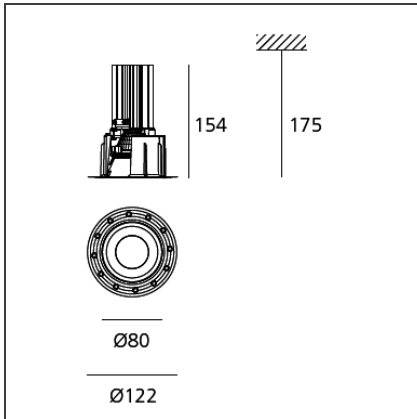

## FEATURES

<b>Article Code:</b>	AB00602	<b>Material:</b>	Aluminium
<b>Colour:</b>	Blue	<b>Series:</b>	Indoor
<b>Installation:</b>	Recessed		

## DIMENSIONS

<b>Height:</b>	cm 15.4	<b>Cutout diameter:</b>	cm 9.2
<b>Weight:</b>	kg 0.3	<b>Cutout shape:</b>	Rounded
<b>Recessed depth:</b>	cm 17.5	<b>Glow Wire Test:</b>	960

## INCLUDED SOURCES

<b>Category:</b>	LED	<b>Color temperature (K):</b>	4000K
<b>Number:</b>	1	<b>Color Tolerance:</b>	MacAdam 3SDCM
<b>Watt:</b>	14W	<b>CRI:</b>	90
<b>Type:</b>	0	<b>Service Life:</b>	L70 (6K) 60000h
<b>Class:</b>	A		

## LUMINAIRE

<b>Power Supply:</b>	Power supply supplied separately	<b>Delivered lumens output (lm):</b>	1047lm
<b>Transformer availability:</b>	Remote	<b>CCT:</b>	4000K
<b>Watt:</b>	14W	<b>Efficiency:</b>	68%
<b>Voltage:</b>	220V-240V	<b>Efficacy:</b>	74.78lm/W
		<b>CRI:</b>	90

**ACCESSORIES**

---



DRIVER cc 16W  
350mA 220-240  
156 52 26 1max  
DALI  
dimmable/Push  
dali  
M077401