

Tetragono Wall - 3000K



IP65


DESIGN BY

Ernesto Gismondi

DESCRIPTION

Light fixture with radial light emission. Consists of body and wall fixing plate. Lamp support in extruded EN-AW-6060 aluminium, subjected to chromate treatment and painted, height 50 mm, with painted steel base flange, with holes for wall installation. Lighting unit in die-cast EN-AB 47100 aluminium painted with 3-stage outdoor treatment: nanotechnologies, anti-oxidizing primer, polyester paint. Provided with metalized polycarbonate reflectors. UV resistant diffuser in shock resistant polycarbonate with bright finish. AISI 316 fixing screws and silicone gaskets. Provided with cable and IP67 connector for the connection to the mains suitable for 5-13.5mm diameter cables. IP Rating IP65. Insulation class I. Technical features in compliance with EN60598-1.

TECHNICAL DRAWINGS

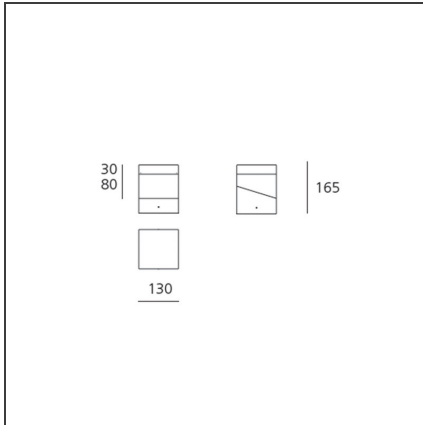

FEATURES

Article Code:	T417300W00	Material:	Aluminum, polycarbonate
Colour:	Grey antracite	Series:	Outdoor
Installation:	Bollard, Floor, Wall		

DIMENSIONS

Length:	cm 13	Impact Resistance:	IK10
Width:	cm 13	Glow Wire Test:	650
Height:	cm 16.5		

INCLUDED SOURCES

Category:	LED	Color temperature (K):	3000K
Number:	1	Color Tolerance:	2SDCM
Watt:	15W	CRI:	80 typ
Delivered lumens output (lm):	1375lm	Efficacy:	106lm/W
Type:	0	Service Life:	L70(6K)>36,300h
Class:	A		

LUMINAIRE

Watt:	15W	Delivered lumens output (lm):	481lm
Voltage:	220V-240V	CCT:	3000K
		Efficiency:	34%
		Efficacy:	32.07lm/W
		CRI:	90