

GLASHÜTTE LIMBURG**Product data sheet****Ceiling and wall luminaire****IP 64****1130.1**

Project · Reference number

Date

Application

Ceiling and wall luminaire with LEDs made of aluminium and hand-blown opal glass, satin matt.

For a variety of interior lighting applications. The used LED technique offers durability and optimal light output with low power consumption at the same time.

Product description

Luminaire made of Aluminium, finish white enamel

Hand-blown opal glass, satin matt, with screw neck

Silicone gasket

2 cable entries for through-wiring for mains supply

cable up to \varnothing 10.5 mm max. 5 G 1.5²

2 fixing holes \varnothing 5.5 mm

190 mm spacing

Plug connection

Connecting terminal 2.5²

Earth conductor connection

2-pole connecting terminal for digital control

LED power supply unit

220-240 V \sim 0/50-60 Hz

DALI controllable

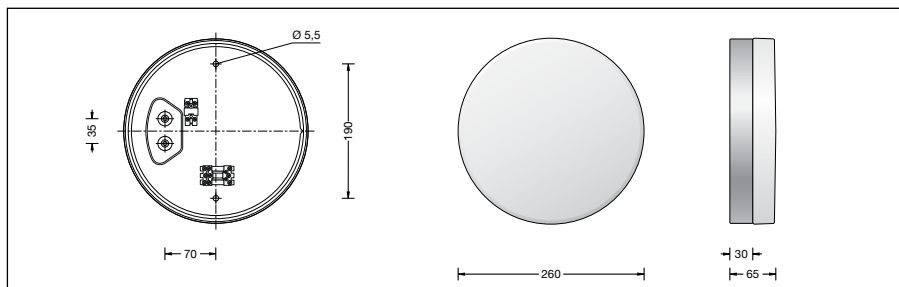
Safety class I

Protection class IP 64

Protected against dust entry and splash water

CE – Conformity mark

Weight: 2.4 kg


www.glashuette-limburg.com
**Lamp**

Module connected wattage	17.4 W
Luminaire connected wattage	21 W
Rated temperature	$t_a = 25^\circ\text{C}$
Service life criteria	50 000 h/L ₇₀

1130.1

Module designation	LED-0448/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	1960 lm
Luminaire luminous flux	1064 lm
Luminaire luminous efficiency	50,7 lm/W

1130.1 K4

Module designation	LED-0448/840
Colour temperature	4000 K
Colour rendering index	$R_a > 80$
Module luminous flux	2070 lm
Luminaire luminous flux	1123 lm
Luminaire luminous efficiency	53,5 lm/W

Article No. 1130.1

Finish options

• Enamel, white	Code number .1
• Stainless steel	Code number .2
• Polished aluminium	Code number .3

Colour temperature 3000 K.

Also available with 4000 K on request.

3000 K – article number

4000 K – article number + **K4**