

**GLASHÜTTE LIMBURG****Product data sheet****Ceiling and wall luminaire****IP 64****1130.2**

Project · Reference number

Date

**Application**

Ceiling and wall luminaire with LEDs made of aluminium and hand-blown opal glass, satin matt.

For a variety of interior lighting applications. The used LED technique offers durability and optimal light output with low power consumption at the same time.

**Product description**

Luminaire made of aluminium, finish stainless steel

Hand-blown opal glass, satin matt, with screw neck

Silicone gasket

2 cable entries for through-wiring for mains supply

cable up to  $\varnothing$  10.5 mm max. 5 G 1.5<sup>2</sup>

2 fixing holes  $\varnothing$  5.5 mm

190 mm spacing

Plug connection

Connecting terminal 2.5<sup>2</sup>

Earth conductor connection

2-pole connecting terminal for digital control

LED power supply unit

220-240 V  $\sim$  0/50-60 Hz

DALI controllable

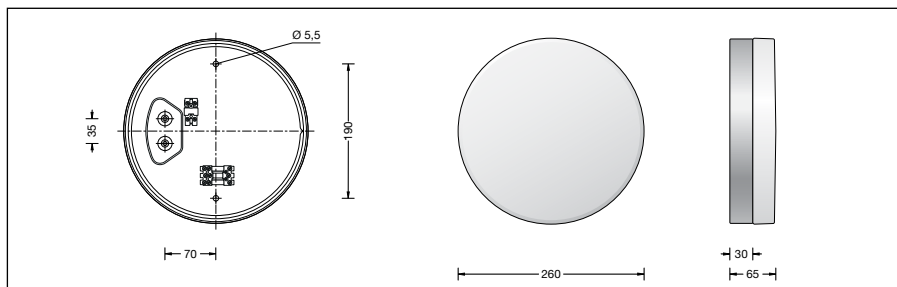
Safety class I

Protection class IP 64

Protected against dust entry and splash water

CE – Conformity mark

Weight: 2.4 kg


[www.glashuette-limburg.com](http://www.glashuette-limburg.com)
**Lamp**

Module connected wattage	17.4 W
Luminaire connected wattage	21 W
Rated temperature	$t_a = 25^\circ\text{C}$
Service life criteria	50 000 h/L <sub>70</sub>

**1130.2**

Module designation	LED-0448/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	1960 lm
Luminaire luminous flux	1064 lm
Luminaire luminous efficiency	50,7 lm/W

**1130.2 K4**

Module designation	LED-0448/840
Colour temperature	4000 K
Colour rendering index	$R_a > 80$
Module luminous flux	2070 lm
Luminaire luminous flux	1123 lm
Luminaire luminous efficiency	53,5 lm/W

**Article No. 1130.2**

Finish options

• Enamel, white	Code number <b>.1</b>
• Stainless steel	Code number <b>.2</b>
• Polished aluminium	Code number <b>.3</b>

Colour temperature 3000 K.

Also available with 4000 K on request.

3000 K – article number

4000 K – article number + **K4**