

BEGA**22 490**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire with shielded light source.
For the illumination of wall and floor spaces.
For interior and exterior application.
The luminaire can be installed in any burning position.

Product description

Luminaire made of aluminium alloy,
aluminium and stainless steel
Crystal glass with optical structure
1 fixing hole \varnothing 6.5 mm
2 cable entries for through-wiring of mains
supply cable \varnothing 7-10.5 mm
Connection terminal 2.5²
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK06
Protection against mechanical
impacts < 1 joule
 – Safety mark
 – Conformity mark
Weight: 2.8 kg

Lamp

Luminaire with lampholder E 27
Lamp output max. 100 W

For this luminaire we recommend the following
BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimnable

13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimnable

13512 LED 8 W · 1055 lm · 2700 K

13564 LED 12 W · 1400 lm · 2700 K

13565 LED 12 W · 1400 lm · 2700 K
dimnable

13588 LED 8 W · 1055 lm · 3000 K

13590 LED 12 W · 1400 lm · 3000 K

13592 LED 12 W · 1400 lm · 3000 K
dimnable


Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K
dimnable

13556 LED 9 W · 805 lm · 2700-6500 K
dimnable · tunable white

13557 LED 9.5 W · 805 lm · 2700-6500 K
dimnable · tunable white · RGBW

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

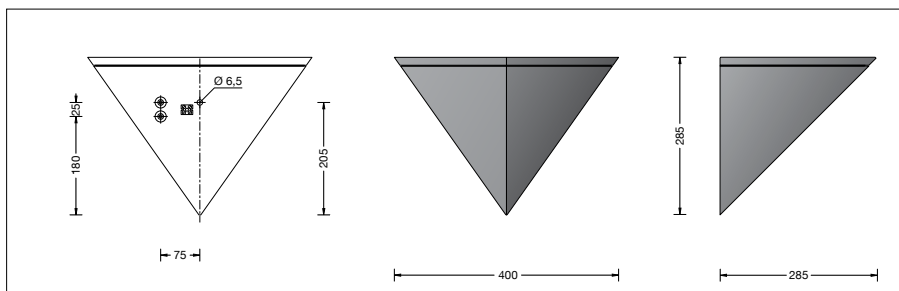

Article No. 22490

Colour optionally graphite, white or silver

Graphite – Article number

White – Article number + **W**

Silver – Article number + **A**