

BEGA**22 603**

Ceiling and wall luminaire



Project · Reference number

Date

Product data sheet

Application

Unshielded luminaire with high protection class for installation under ceilings and on walls. A luminaire made of die cast aluminium and impact resistant crystal glass with light diffusing structures.

Product description

Luminaire made of aluminium alloy and stainless steel
 BEGA Unidure® coating technology
 Crystal glass with optical structure
 2 mounting holes \varnothing 5.3 mm
 Distance apart 90 mm
 2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
 Connection terminal 2.5²
 Earth conductor connection
 Lampholder E 27
 Safety class I
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK07
 Protection against mechanical impacts < 2 joule
 – Safety mark
 – Conformity mark
 Weight: 2.2 kg

Lamps

Luminaire with lampholder E 27
 Lamp output max. 2 × 60 W

For this luminaire we recommend the following BEGA LED lamps:



13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
 dimmable

13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
 dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

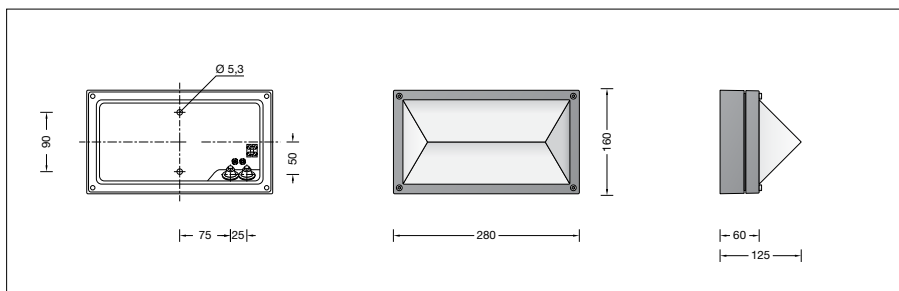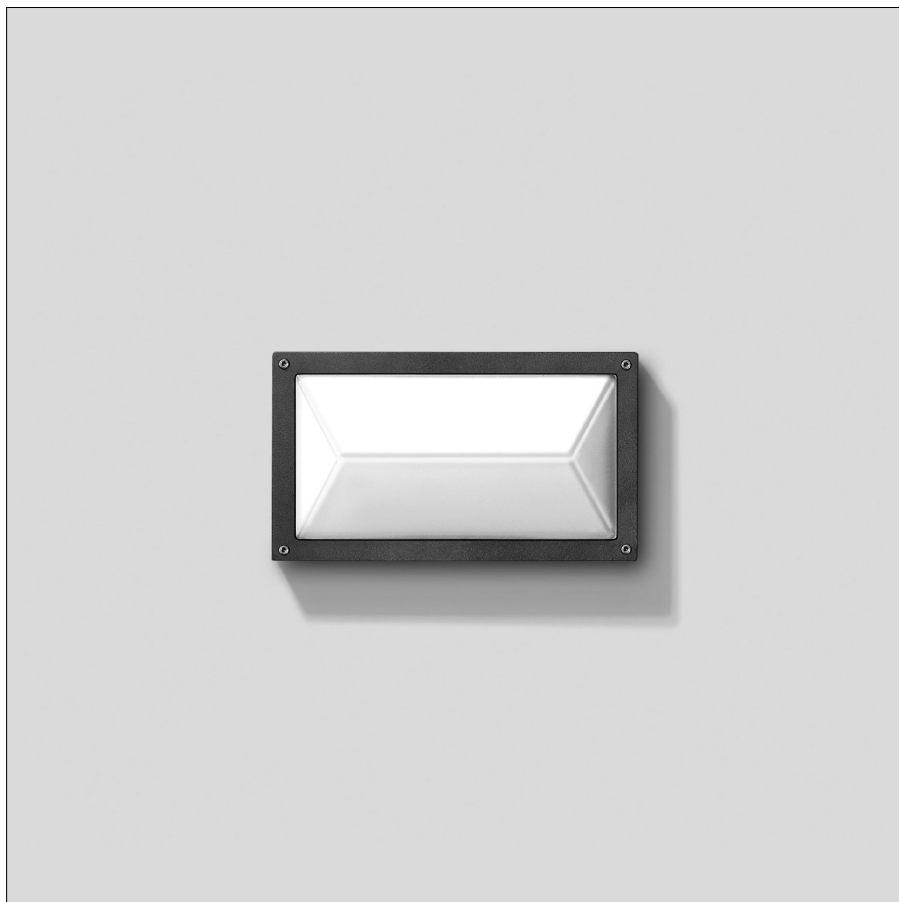

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 22 603

Colour graphite or silver
 graphite – article number
 silver – article number + **A**

Light distribution

