BEGA

Wall luminaire

Project · Reference number

Product data sheet

Application

Shielded wall luminiaire with high protection class for a variety of lighting tasks. A luminaire made of die cast aluminium and impact resistant crystal glass with light diffusing structures.

Product description

Luminaire made of aluminium alloy and stainless steel Crystal glass with optical structure 2 mounting holes ø 5.3 mm Distance apart 90 mm 2 cable entries for through-wiring of mains supply cable ø 7-10.5 mm Connection terminal 2.5[□] Earth conductor connection Lampholder E 27 Safety class I Protection class IP 65 Dust-tight and protection against water jets Impact strength IK07 Protection against mechanical impacts < 2 joule 🛣 🗠 – Safety mark **C** – Conformity mark Weight: 2.4 kg

Lamps


Luminaire with lampholder E 27 Lamp output max. 2×60 W

For this luminaire we recommend the following **BEGA LED lamps:**

13510	LED 7 W · 805 lm · 2700 K
13548	LED 7 W · 805 lm · 2700 K
	dimmable

13 584 LED 7 W · 805 lm · 3000 K 13 586 LED 7 W · 805 lm · 3000 K dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

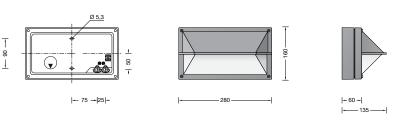

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 22613

Colour graphite or silver graphite - article number silver - article number + A

Light distribution





Date

22613

10 🖄 IP 65