

**BEGA****22 633**

Ceiling · Wall · Pillar luminaire



Project · Reference number

Date

## Product data sheet

### Application

Ceiling, wall and pillar luminaire with high constructive strength.

The thick-walled crystal glass with optical structure distributes the light uniformly.

### Product description

Luminaire made of aluminium alloy and stainless steel

BEGA Unidure® coating technology

Crystal glass with optical structure

2 mounting holes  $\varnothing$  5.5 mm

Distance apart 144 mm

2 cable entries for through-wiring of mains supply cable  $\varnothing$  7-10.5 mm

Connecting terminal and

earth conductor terminal 2.5<sup>2</sup>

Lampholder E 27

Safety class I

Protection class IP 65

Dust-tight and protection against water jets

Impact strength IK06

Protection against mechanical

impacts < 1 joule

– Safety mark

– Conformity mark

Weight: 3.0 kg

### Lamp

Luminaire with lampholder E 27

Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

**13510** LED 7 W · 805 lm · 2700 K

**13548** LED 7 W · 805 lm · 2700 K  
dimnable

**13584** LED 7 W · 805 lm · 3000 K

**13586** LED 7 W · 805 lm · 3000 K  
dimnable

**13512** LED 8 W · 1055 lm · 2700 K

**13588** LED 8 W · 1055 lm · 3000 K


Radio-controlled version (Zigbee 3.0):

**13555** LED 9 W · 805 lm · 2700 K  
dimnable

**13556** LED 9 W · 805 lm · 2700-6500 K  
dimnable · tunable white

**13557** LED 9.5 W · 805 lm · 2700-6500 K  
dimnable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

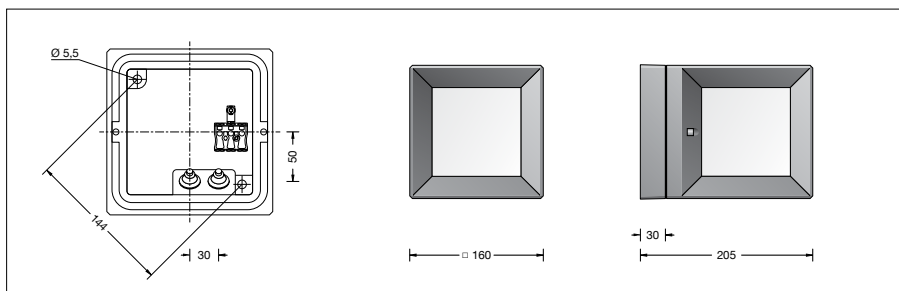

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

### Article No. 22 633

Colour graphite or silver  
graphite – article number  
silver – article number + **A**

### Light distribution

