

**GLASHÜTTE LIMBURG****Product data sheet****Ceiling and wall luminaire****IP 44****2297 P**

Project · Reference number

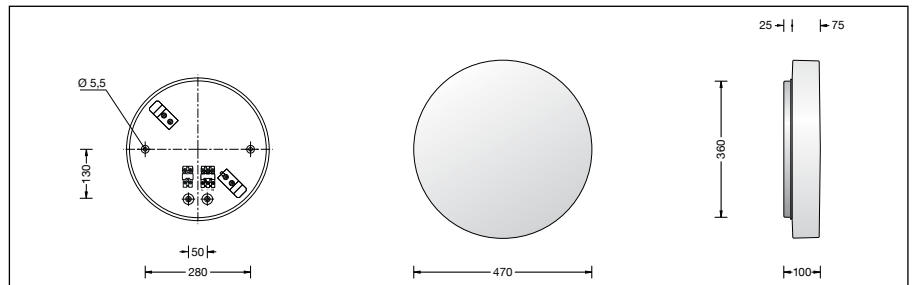
Date

**Application**

Ceiling and wall luminaire made of impact resistant synthetic diffuser and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. High operating efficiency because of long maintenance intervals and high light output with low connected load.

**Product description**

Metal housing,  
finish white enamel  
Impact resistant synthetic diffuser, white,  
with sliding-bolt closure  
2 fixing holes  $\varnothing$  5.5 mm  
280 mm spacing  
2 cable entries for through-wiring for mains  
cable up to  $\varnothing$  10,5 mm max. 5 x 1.5<sup>□</sup>  
Plug connection  
Connecting terminal 2.5<sup>□</sup>  
Earth conductor connection  
2-pole connecting terminal for  
digital control  
LED power supply unit  
220-240 V  $\sim$  0/50-60 Hz  
DALI controllable  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies  
> 1 mm and splash water  
**CE** – Conformity mark

**Lamp**

Module connected wattage	38.7 W
Luminaire connected wattage	43.5 W
Rated temperature	$t_a = 25^\circ\text{C}$
Service life criteria	50 000 h/L <sub>70</sub>

**Article No. 2297P**

Colour temperature 3000 K.  
Also available with 4000 K on request.  
3000 K – article number  
4000 K – article number + **K4**

**2297 P**

Module designation	LED-0531/830
Colour temperature	3000 K
Colour rendering index	$R_a > 80$
Module luminous flux	5225 lm

**2297 P K4**

Module designation	LED-0531/840
Colour temperature	4000 K
Colour rendering index	$R_a > 80$
Module luminous flux	5225 lm