

BEGA**23 374.2**

Wall luminaire for indoor use



Project · Reference number



Date

Product data sheet

Application

Wall luminaire · indoor luminaire, inside white and die-cast zinc luminaire housing.

Product description

Die-cast zinc luminaire housing,
stainless steel finish
Crystal glass, inside white
2 elongated fixing holes
Width 5 mm · 76,5 mm spacing
1 cable entry for mains supply cable
up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connecting terminals 2.5^{\square}
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DC 176-264 V
Safety class I
 – Safety mark
 – Conformity mark
Weight: 1.1 kg

Inrush current

Inrush current: 7 A / 112 μ s
Maximum number of luminaires of this type per miniature circuit breaker:
B10A: 38 luminaires
B16A: 61 luminaires
C10A: 64 luminaires
C16A: 102 luminaires

Lamp



Module connected wattage 3.9 W
Luminaire connected wattage 5 W
Rated temperature $t_a = 25^{\circ}\text{C}$
Ambient temperature $t_{a \text{ max}} = 45^{\circ}\text{C}$

23 374.2 K3

Module designation LED-0265/930
Colour temperature 3000 K
Colour rendering index CRI > 90
Module luminous flux 625 lm
Luminaire luminous flux 124 lm
Luminaire luminous efficiency 24,8 lm/W

23 374.2 K4

Module designation LED-0265/940
Colour temperature 4000 K
Colour rendering index CRI > 90
Module luminous flux 660 lm
Luminaire luminous flux 131 lm
Luminaire luminous efficiency 26,2 lm/W

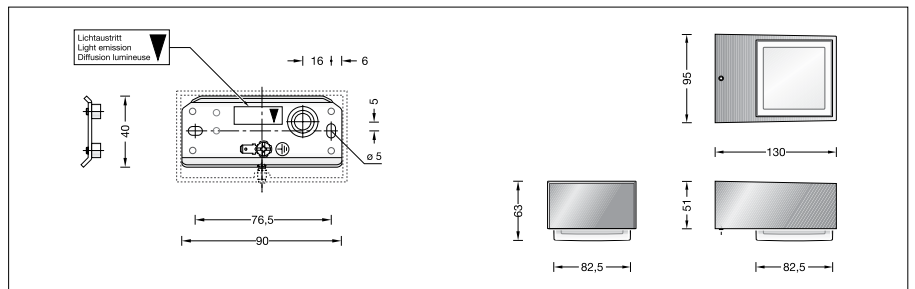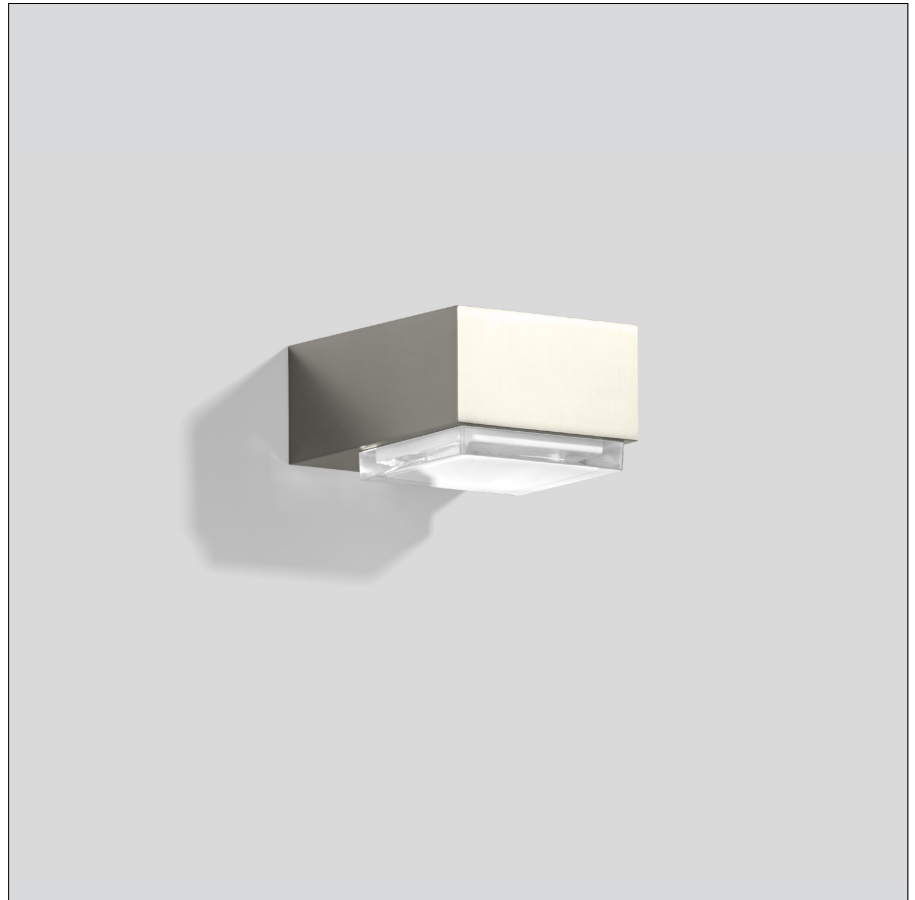

Service life of the LED

Ambient temperature $t_a = 25^{\circ}\text{C}$
– at > 500,000h: L70B50

max. ambient temperature $t_a = 45^{\circ}\text{C}$
– at 300,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 23 374.2

LED colour temperature optionally 3000 K or 4000 K
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Optional finishes

- White enamel code number **.1**
- Stainless steel code number **.2**
- Chrome code number **.3**