

BEGA**24 252**

Recessed ceiling luminaire

IP 65

Project · Reference number

Date

Product data sheet

Application

LED recessed ceiling downlight with symmetrical wide beam light distribution. With external DALI controllable power supply unit for installation into concrete ceilings or suspended ceilings both indoors and out.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
 Cover ring aluminium alloy
 Clear safety glass
 Optical silicone lens
 Reflector surface made of pure aluminium
 Luminaire housing with 2 fixing claws and guide screws
 Recessed opening \varnothing 128 mm
 Recessed depth required 100 mm
 The external connection housing is made of glass fibre reinforced synthetic material (polyamide).
 2 screw cable glands with strain relief for through-wiring power connecting cable \varnothing 4–10 mm, max. $5 \times 1.5^{\square}$
 Connecting terminals 2.5^{\square}
 0,7 m connection cable with plug between the luminaire and the power supply unit
 Safety class II \square
 Protection class IP 65
 Dust-tight and protection against water jets
 Impact strength IK07
 Protection against mechanical impacts < 2 joule
CE – Conformity mark
 Weight: 1.2 kg

Lamp

Module connected wattage	8.1 W
Luminaire connected wattage	10 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 45^{\circ}\text{C}$
When installed in heat-insulating material	$t_{a\text{max}} = 35^{\circ}\text{C}$

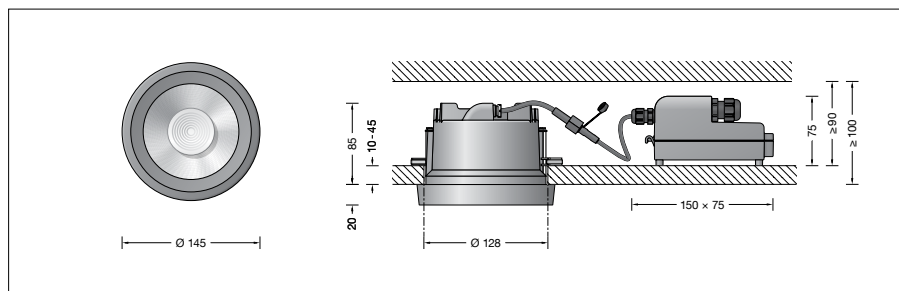
On request we can offer you modifications for environments with higher temperatures as a customized product.

24 252 K3

Module designation	LED-0800/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	1465 lm
Luminaire luminous flux	1155 lm
Luminaire luminous efficiency	115,5 lm/W

24 252 K4

Module designation	LED-0800/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	1500 lm
Luminaire luminous flux	1183 lm
Luminaire luminous efficiency	118,3 lm/W

**Service life · Ambient temperature**

Ambient temperature $t_a = 25^{\circ}\text{C}$	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L 80 B 50) 100,000 h (L 80 B 50)

Ambient temperature $t_a = 45^{\circ}\text{C}$	
LED psu:	50,000 h
LED module:	160,000 h (L 80 B 50) 100,000 h (L 80 B 50)

Lighting technology

Half beam angle 72°
 Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website www.bega.com.

Inrush current

Inrush current: 5 A / 50 μs
 Maximum number of luminaires of this type per miniature circuit breaker:
 B 10 A: 31 luminaires
 B 16 A: 50 luminaires
 C 10 A: 52 luminaires
 C 16 A: 85 luminaires

Article No. 24 252

LED colour temperature optionally 3000 K or 4000 K
 3000 K – Article number + **K3**
 4000 K – Article number + **K4**

Colour optionally graphite or white
 Graphite – Article number
 White – Article number + **W**

Accessories

10 441 Installation housing

A separate instructions for use can be provided upon request.

Light distribution