

**BEGA****24 268**

Recessed ceiling luminaire

IP 65

Project · Reference number

Date

## Product data sheet

**Application**

Recessed LED ceiling luminaire with flat beam light distribution. With external DALI controllable power supply unit for installation into concrete ceilings or suspended ceilings both indoors and out.

**Product description**

Luminaire made of aluminium alloy, aluminium and stainless steel  
Cover ring aluminium alloy  
Matt safety glass  
Optical silicone lens  
Reflector surface made of pure aluminium  
Luminaire housing with 2 fixing claws and guide screws  
Recessed opening  $\varnothing$  128 mm  
Recessed depth required 100 mm  
The external connection housing is made of glass fibre reinforced synthetic material (polyamide).  
2 screw cable glands with strain relief for through-wiring power connecting cable  $\varnothing$  4–10 mm, max.  $5 \times 1.5^{\square}$   
Connecting terminals  $2.5^{\square}$   
0,7 m connection cable with plug between the luminaire and the power supply unit  
Safety class II  $\square$   
Protection class IP 65  
Dust-tight and protection against water jets  
Impact strength IK07  
Protection against mechanical impacts < 2 joule  
**CE** – Conformity mark  
Weight: 1.2 kg

**Lamp**

Module connected wattage	8.1 W
Luminaire connected wattage	10 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a \text{ max}} = 45^{\circ}\text{C}$
When installed in heat-insulating material	$t_{a \text{ max}} = 35^{\circ}\text{C}$

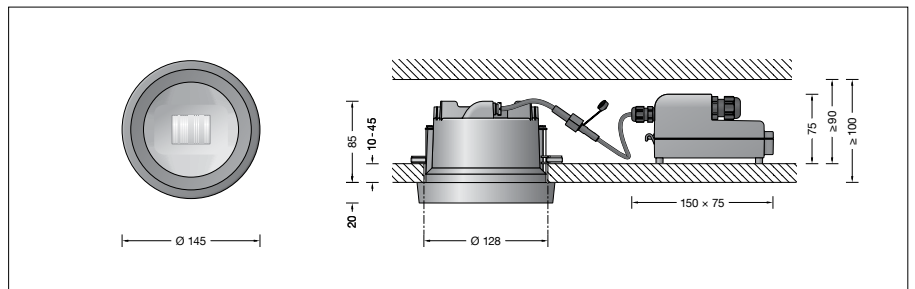

On request we can offer you modifications for environments with higher temperatures as a customized product.

**24 268 K3**

Module designation	LED-0800/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	1465 lm
Luminaire luminous flux	980 lm
Luminaire luminous efficiency	98 lm/W

**24 268 K4**

Module designation	LED-0800/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	1500 lm
Luminaire luminous flux	1003 lm
Luminaire luminous efficiency	100,3 lm/W

**Light distribution****Service life · Ambient temperature**

Ambient temperature $t_a = 25^{\circ}\text{C}$	
LED psu:	> 50,000 h
LED module:	> 200,000 h (L 80 B 50)
	100,000 h (L 80 B 50)

Ambient temperature $t_a = 45^{\circ}\text{C}$	
LED psu:	50,000 h
LED module:	160,000 h (L 80 B 50)
	100,000 h (L 80 B 50)

**Lighting technology**

Half beam angle  $100/57^{\circ}$   
Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and interior lighting as well as luminaire data in EULUMDAT and IES format are available on our website [www.bega.com](http://www.bega.com).

**Inrush current**

Inrush current: 5 A / 50  $\mu\text{s}$   
Maximum number of luminaires of this type per miniature circuit breaker:  
B 10 A: 31 luminaires  
B 16 A: 50 luminaires  
C 10 A: 52 luminaires  
C 16 A: 85 luminaires

**Article No. 24 268**

LED colour temperature optionally 3000 K or 4000 K  
3000 K – Article number + **K3**  
4000 K – Article number + **K4**

Colour optionally graphite or white  
Graphite – Article number  
White – Article number + **W**

**Accessories**

**10 441** Installation housing

A separate instructions for use can be provided upon request.