

**BEGA****24 406**

Ceiling mounted downlight



Project · Reference number


Date

## Product data sheet

### Application

Compact LED downlight with symmetrical wide beam light distribution.

### Product description

Luminaire made of aluminium alloy,  
aluminium and stainless steel  
BEGA Unidure® coating technology  
Clear safety glass  
Silicone gasket  
Reflector surface made of pure aluminium  
Optical silicone lens · BEGA Hybrid Optics®  
2 mounting holes  $\varnothing$  4.3 mm  
Distance apart 106 mm  
2 cable entries for through-wiring of mains  
supply cable  $\varnothing$  7-10.5 mm, max. 5 G 1.5<sup>2</sup>  
Connection terminal 2.5<sup>2</sup>  
Earth conductor connection  
LED power supply unit  
220-240 V  $\sim$  0/50-60 Hz  
DC 176-276 V  
DALI controllable  
A basic isolation exists between power cable  
and control line  
BEGA Thermal Control®  
Temporary thermal regulation to protect  
temperature-sensitive components without  
switching off the luminaire  
Safety class I  
Protection class IP 65  
Dust-tight and protection against water jets  
Impact strength IK08  
Protection against mechanical  
impacts < 5 joule  
 – Safety mark  
**CE** – Conformity mark  
Weight: 1.4 kg

### Lamp

Module connected wattage	16.8 W
Luminaire connected wattage	19.3 W
Rated temperature	$t_a = 25\text{ }^\circ\text{C}$
Ambient temperature	$t_{a\text{ max}} = 45\text{ }^\circ\text{C}$



### 24 406 K3

Module designation	LED-0800/830
Colour temperature	3000 K
Colour rendering index	CRI > 80
Module luminous flux	2850 lm
Luminaire luminous flux	2220 lm
Luminaire luminous efficiency	115 lm/W

### 24 406 K4

Module designation	LED-0800/840
Colour temperature	4000 K
Colour rendering index	CRI > 80
Module luminous flux	2920 lm
Luminaire luminous flux	2275 lm
Luminaire luminous efficiency	117,9 lm/W

### Light distribution

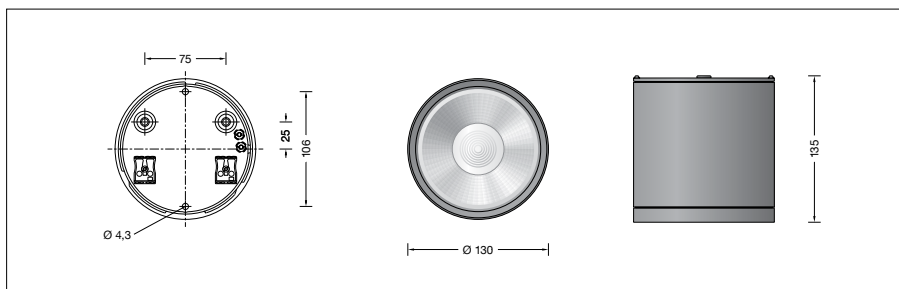

### Service life · Ambient temperature

Rated temperature  $t_a = 25\text{ }^\circ\text{C}$   
LED psu: > 50,000 h  
LED module: 200,000 h (L80 B50)

Ambient temperature  $t_{a\text{ max}} = 45\text{ }^\circ\text{C}$  (100 %)  
LED psu: 50,000 h  
LED module: 140,000 h (L80 B50)

### Lighting technology

Half beam angle  $39^\circ$   
Luminaire data for the light planning program  
DIALux for outdoor lighting, street lighting and  
interior lighting as well as luminaire data in  
EULUMDAT and IES format are available on our  
website [www.bega.com](http://www.bega.com).

### Inrush current

Inrush current: 12 A / 24.2  $\mu\text{s}$   
Maximum number of luminaires of this  
type per miniature circuit breaker:  
B 10A: 50 luminaires  
B 16A: 50 luminaires  
C 10A: 50 luminaires  
C 16A: 50 luminaires

### Article No. 24 406

LED colour temperature optionally 3000K  
or 4000K  
3000 K – Article number + **K3**  
4000 K – Article number + **K4**  
Colour optionally graphite or white  
Graphite – Article number  
White – Article number + **W**