

Pendant luminaire

Project · Reference number

Date

Product data sheet

Application

Pendant luminaire with drum lens for narrow beam and directed light.
Luminaire distinguished by its high corrosion resistance.
If installed in exterior environment the ceiling cup is to be protected against wetness.

Product description

Luminaire made of copper, brass and stainless steel
Optical cylindrical lens made of crystal glass.
Chain pendant with cable H05RN-F 3×0,75[□]
Total length 1,6 m
Connecting terminal and earth conductor terminal 2.5[□]
Lampholder E 27
Safety class I

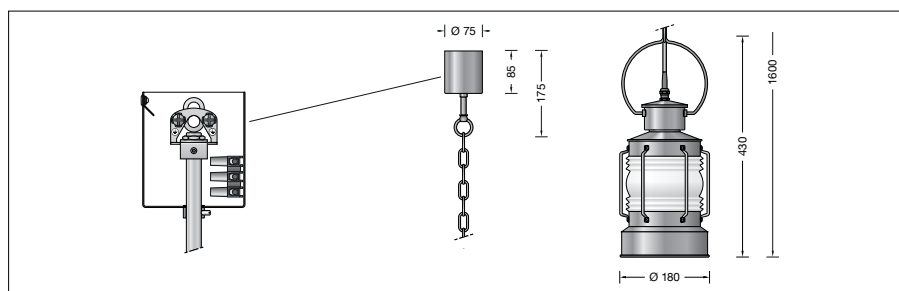
Lamp compartment: Protection class IP 23
Protected against granular foreign bodies > 12 mm and showers up to 60°

Canopy: Protection class IP 20
Protected against granular foreign bodies > 12 mm

CE – Conformity mark
Weight: 2.5 kg

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour.
Time and weather factors create the natural patina characteristic for copper.

**Lamp**

Luminaire with lampholder E 27
Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

13 509 LED 7 W · 805 lm · 2700 K

13 547 LED 7 W · 805 lm · 2700 K
dimmmable

13 583 LED 7 W · 805 lm · 3000 K

13 585 LED 7 W · 805 lm · 3000 K
dimmmable

13 511 LED 8 W · 1055 lm · 2700 K

13 587 LED 8 W · 1055 lm · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.