

BEGA**31 312**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Wall luminaire made of copper and hand-blown opal glass.

A luminaire shielded to the top for a host of lighting applications in interior and exterior design.

Product description

Luminaire back housing made of aluminium alloy
Surround made of copper

Opal glass

2 mounting holes \varnothing 6.5 mm

Distance apart 85 mm

1 cable entry for mains supply cable

up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$

Lampholder terminal 2.5^{\square}

Earth conductor connection

Lampholder E 27

Safety class I

Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

– Safety mark

CE – Conformity mark

Weight: 4.8 kg

Lamp

Luminaire with lampholder E 27

Lamp output max. 100 W

For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimmmable

13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimmmable

13512 LED 8 W · 1055 lm · 2700 K

13564 LED 12 W · 1400 lm · 2700 K


13565 LED 12 W · 1400 lm · 2700 K
dimmmable

13588 LED 8 W · 1055 lm · 3000 K

13590 LED 12 W · 1400 lm · 3000 K

13592 LED 12 W · 1400 lm · 3000 K
dimmmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

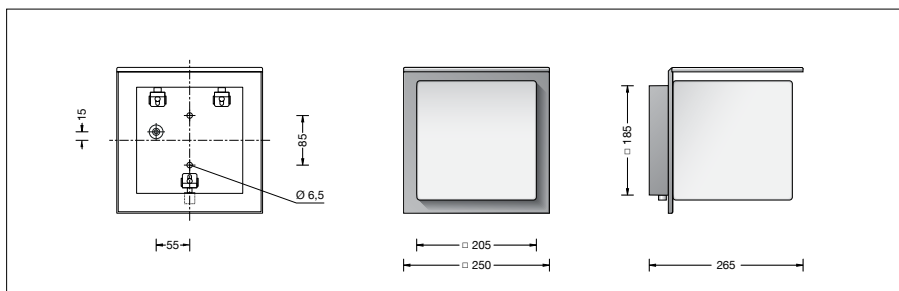

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.