BEGA

Ceiling and wall luminaire



Project · Reference number

Date

Product data sheet

Application

Free-radiating ceiling and wall luminaire for many lighting tasks in or on buildings. Luminaire made of copper and thick-walled crystal glass.

Product description

Luminaire made of copper and stainless steel Crystal glass coated Reflector made of pure anodised aluminium 2 mounting holes ø 4.5 mm Distance apart 97 mm 1 cable entry for mains supply cable up to Ø 10,5 mm max. $3 \times 1,5^{\circ}$ Lampholder terminal 2.5 Earth conductor connection Lampholder E 27 Safety class I Protection class IP 64 Dust-tight and protection against splash water **₹10** ♠ – Safety mark

C ∈ – Conformity mark Weight: 2.0 kg

Lamp

Luminaire with lampholder E 27 Lamp output max. 60 W


For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K 13548 LED 7 W · 805 lm · 2700 K dimmable

13 584 LED 7 W · 805 lm · 3000 K 13 586 LED 7 W · 805 lm · 3000 K dimmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.



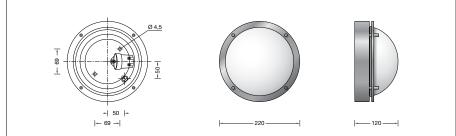

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.