

BEGA**31 491**

Ceiling and wall luminaire



Project · Reference number


Date

Product data sheet

Application

Free-radiating ceiling and wall luminaire for many lighting tasks in or on buildings.
Luminaire made of copper and thick-walled crystal glass.

Product description

Luminaire made of copper and stainless steel
Crystal glass coated
2 mounting holes \varnothing 5.5 mm
Distance apart 153 mm
1 cable entry for mains supply cable
up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
Lampholder terminal 2.5^{\square}
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 64
Dust-tight and protection against splash water
 – Safety mark
CE – Conformity mark
Weight: 2.8 kg

Lamp

Luminaire with lampholder E 27
Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimnable


13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimnable

13512 LED 8 W · 1055 lm · 2700 K

13588 LED 8 W · 1055 lm · 3000 K

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

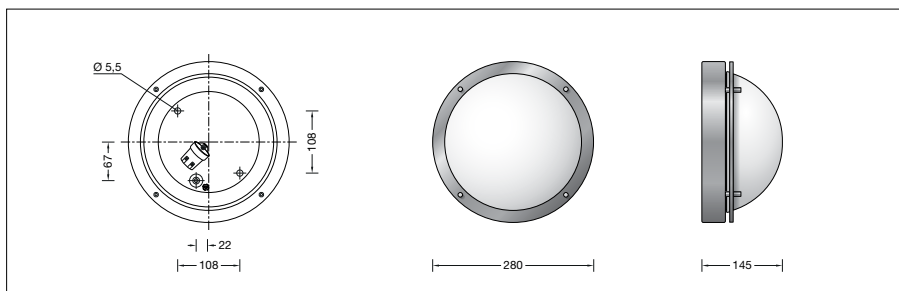

Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.