

**BEGA****31 495**

Ceiling and wall luminaire



Project · Reference number

Date

## Product data sheet

### Application

Free-radiating ceiling and wall luminaire for many lighting tasks in or on buildings.  
Luminaire made of copper and thick-walled crystal glass.

### Product description

Luminaire made of copper,  
brass and stainless steel  
Crystal glass coated  
Reflector made of pure anodised aluminium  
2 mounting holes  $\varnothing$  4.5 mm  
Distance apart 97 mm  
1 cable entry for mains supply cable  
up to  $\varnothing$  10,5 mm max.  $3 \times 1,5^{\square}$   
Lampholder terminal  $2.5^{\square}$   
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 64  
Dust-tight and protection against splash water  
 – Safety mark  
**CE** – Conformity mark  
Weight: 2.1 kg

### Lamp

Luminaire with lampholder E 27  
Lamp output max. 60 W

For this luminaire we recommend the following  
BEGA LED lamps:


**13 510** LED 7 W · 805 lm · 2700 K

**13 548** LED 7 W · 805 lm · 2700 K  
dimmmable

**13 584** LED 7 W · 805 lm · 3000 K

**13 586** LED 7 W · 805 lm · 3000 K  
dimmmable

Detailed technical and lighting data for the  
lamps can be found in the data sheets on our  
website.

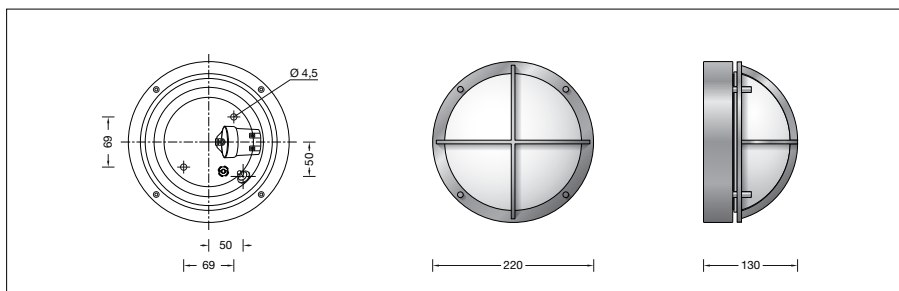

### Copper

The luminaire parts made of solid copper are delivered with the metal's natural surface colour. Time and weather factors create the natural patina characteristic for copper.

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).