

BEGA**33 186**

Lichtbaustein®



Project · Reference number

Date

Product data sheet

Application

Lichtbaustein®

Ceiling and wall luminaire for many lighting tasks.
Ideal for places where a soft and uniform lighting distribution is required.
For interior and exterior applications.

Product description

Luminaire made of aluminium alloy and stainless steel
BEGA Unidure® coating technology
Opal glass
2 mounting holes \varnothing 5 mm
Distance apart 245 mm
2 cable entries for through-wiring of mains supply cable \varnothing 7-10.5 mm
Connection terminal 2.5²
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 44
Protected against granular foreign bodies > 1 mm and splash water
Impact strength IK05
Protection against mechanical impacts < 0.7 joule
 – Safety mark
CE – Conformity mark
Weight: 1.3 kg


Lamps

Luminaire with lampholder E 27
Lamp output max. 2 × 40 W

For this luminaire we recommend the following BEGA LED lamps:

- 13 510** LED 7 W · 805 lm · 2700 K
- 13 548** LED 7 W · 805 lm · 2700 K
dimmmable
- 13 584** LED 7 W · 805 lm · 3000 K
- 13 586** LED 7 W · 805 lm · 3000 K
dimmmable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

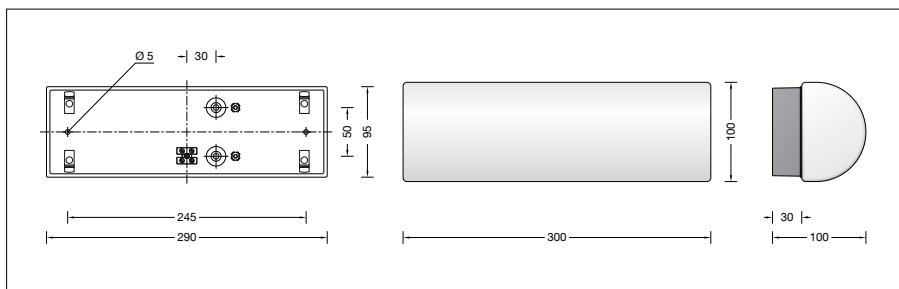

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Light distribution

