

**BEGA****33 187**

Lichtbaustein ®



Project · Reference number

Date

## Product data sheet

### Application

#### Lichtbaustein®

Ceiling and wall luminaire for many lighting tasks.  
Ideal for places where a soft and uniform lighting distribution is required.  
For interior and exterior applications.

### Product description

Luminaire made of aluminium alloy and stainless steel  
BEGA Unidure® coating technology  
Opal glass  
2 mounting holes  $\varnothing$  5 mm  
Distance apart 265 mm  
2 cable entries for through-wiring of mains supply cable  $\varnothing$  7-10.5 mm  
Connection terminal 2.5<sup>2</sup>  
Earth conductor connection  
Lampholder E 27  
Safety class I  
Protection class IP 44  
Protected against granular foreign bodies > 1 mm and splash water  
Impact strength IK02  
Protection against mechanical impacts < 0.2 joule  
 – Safety mark  
**CE** – Conformity mark  
Weight: 1.6 kg


### Lamps

Luminaire with lampholder E 27  
Lamp output max. 2 × 60 W

For this luminaire we recommend the following BEGA LED lamps:

- 13 510** LED 7 W · 805 lm · 2700 K
- 13 548** LED 7 W · 805 lm · 2700 K  
dimnable
- 13 584** LED 7 W · 805 lm · 3000 K
- 13 586** LED 7 W · 805 lm · 3000 K  
dimnable

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

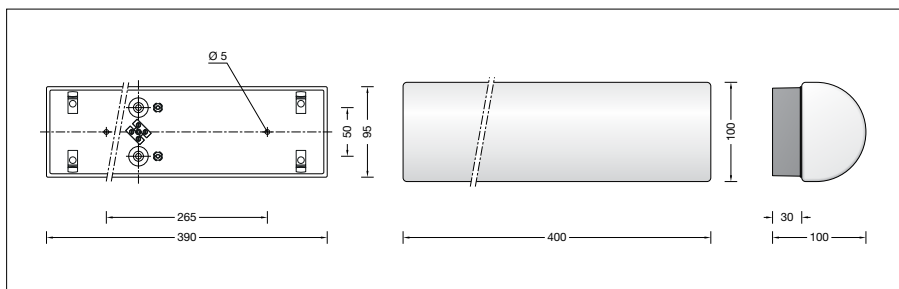

### Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page [www.bega.com](http://www.bega.com).

### Light distribution

