

BEGA**33 345**

Wall luminaire



Project · Reference number


Date

Product data sheet

Application

Wall luminaire with light emission on two sides.
Fully glare-free light for illuminating wall surfaces
and roadways adjacent to the walls. For interior
and exterior lighting design.

Product description

Luminaire made of aluminium alloy
and stainless steel
Crystal glass coated
Silicone gasket
2 mounting holes \varnothing 5.5 mm
Distance apart 220 mm
2 cable entries for through-wiring of mains
supply cable \varnothing 7-10.5 mm
Connection terminal 2.5²
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK07
Protection against mechanical
impacts < 2 joule
 – Safety mark
CE – Conformity mark
Weight: 4.1 kg

Lamps

Luminaire with lampholder E 27
Lamp output max. 2 × 60 W

For this luminaire we recommend the following
BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimnable

13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimnable


Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K
dimnable

13556 LED 9 W · 805 lm · 2700-6500 K
dimnable · tunable white

13557 LED 9.5 W · 805 lm · 2700-6500 K
dimnable · tunable white · RGBW

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

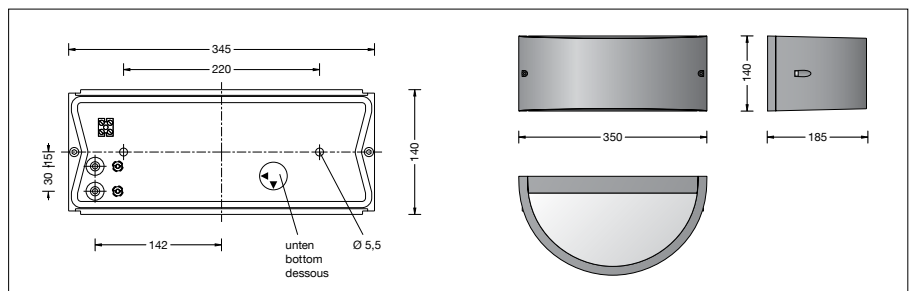

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Article No. 33345

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution

