

BEGA**33 473**

Wall luminaire



Project · Reference number

Date

Product data sheet

Application

Unshielded wall luminaire with high protection class for a variety of lighting tasks.
A luminaire made of die cast aluminium and impact resistant crystal glass.
The luminaire can be installed in any burning position.

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
Crystal glass coated
2 mounting holes \varnothing 4,5 mm
Distance apart 250 mm
2 cable entries for through-wiring of mains supply cable \varnothing 7-10,5 mm, max. 3G 1.5[□]
Connection terminal 2.5[□]
Earth conductor connection
Lampholder E 27
Safety class I
Protection class IP 65
Dust-tight and protection against water jets
Impact strength IK05
Protection against mechanical impacts < 0.7 joule
 – Safety mark
CE – Conformity mark
Weight: 2.7 kg

Lamps

Luminaire with lampholder E 27
Lamp output max. 75 W

For this luminaire we recommend the following BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimmmable

13512 LED 8 W · 1055 lm · 2700 K


Radio-controlled version (Zigbee 3.0):

13555 LED 9 W · 805 lm · 2700 K
dimmmable

13556 LED 9 W · 805 lm · 2700-6500 K
dimmmable · tunable white

13557 LED 9.5 W · 805 lm · 2700-6500 K
dimmmable · tunable white · RGBW

Detailed technical and lighting data for the lamps can be found in the data sheets on our website.

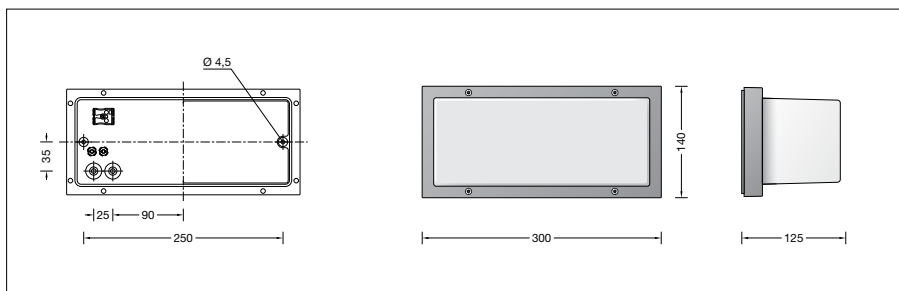

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 33473

Colour graphite or silver
graphite – article number
silver – article number + **A**