

BEGA**33 634**

Ceiling and wall luminaire



Project · Reference number

Date

Product data sheet

Application

Ceiling and wall luminaire made of aluminium and hand-blown satin matt three-ply opal glass. For a variety of interior and exterior lighting applications.

Ideal for places where a soft and uniform lighting distribution is required.

Product description

Luminaire made of aluminium and stainless steel
BEGA Unidure® coating technology

Opal glass, satin matt, with screw neck
Silicone gasket

Reflector made of pure anodised aluminium

2 mounting holes \varnothing 5.5 mm

Distance apart 280 mm

2 cable entries for through-wiring of mains
supply cable \varnothing 7-10.5 mm

Connecting terminal and
earth conductor terminal 2.5²

Lampholder E 27

Safety class I

Protection class IP 64

Dust-tight and protection against splash water

Impact strength IK04

Protection against mechanical

impacts < 0.5 joule

– Safety mark

CE – Conformity mark

Weight: 3.5 kg

Lamps

Luminaire with lampholder E 27

Lamp output max. 3 × 60 W

For this luminaire we recommend the following
BEGA LED lamps:

13510 LED 7 W · 805 lm · 2700 K

13548 LED 7 W · 805 lm · 2700 K
dimnable


13584 LED 7 W · 805 lm · 3000 K

13586 LED 7 W · 805 lm · 3000 K
dimnable

13512 LED 8 W · 1055 lm · 2700 K

13588 LED 8 W · 1055 lm · 3000 K

Detailed technical and lighting data for the
lamps can be found in the data sheets on our
website.

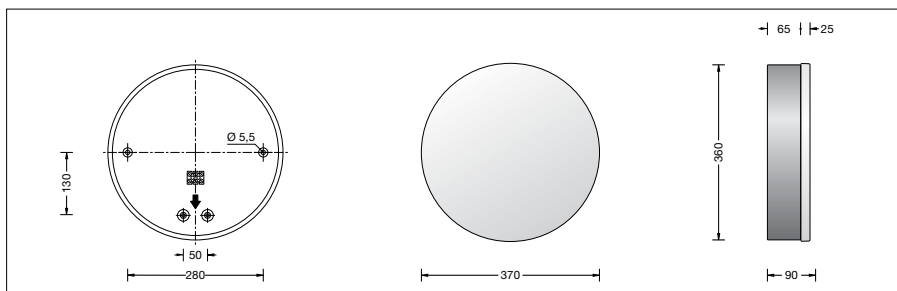

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Article No. 33 634

Colour graphite or silver
graphite – article number
silver – article number + **A**

Light distribution

