

BEGA**33 862**

Lichtbaustein®



Project · Reference number



Date

Product data sheet

Application

Lichtbaustein® Square
Ceiling and wall luminaire for many lighting tasks.
Ideal for places where a soft and uniform
lighting distribution is required.

Product description

Luminaire made of aluminium alloy
and stainless steel
Opal glass satin matt
2 mounting holes \varnothing 5 mm
Distance apart 90 mm
1 cable entry for mains supply cable
up to \varnothing 10,5 mm max. $3 \times 1,5^{\square}$
2 prefabricated cable ducts for surface
mounted mains supply cables \varnothing 7-10,5 mm
Lampholder terminal 2.5^{\square}
Earth conductor connection
Lampholder E 14
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
 – Safety mark
 – Conformity mark
Weight: 0.7 kg

Lamp

Luminaire with lampholder E 14
Lamp output max. 40 W

For this luminaire we recommend the following
BEGA LED lamps:

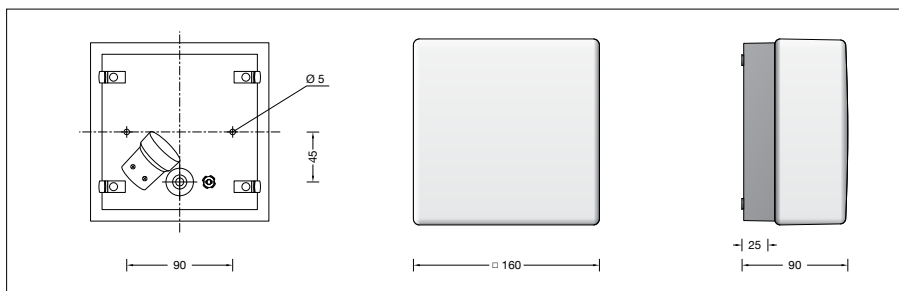
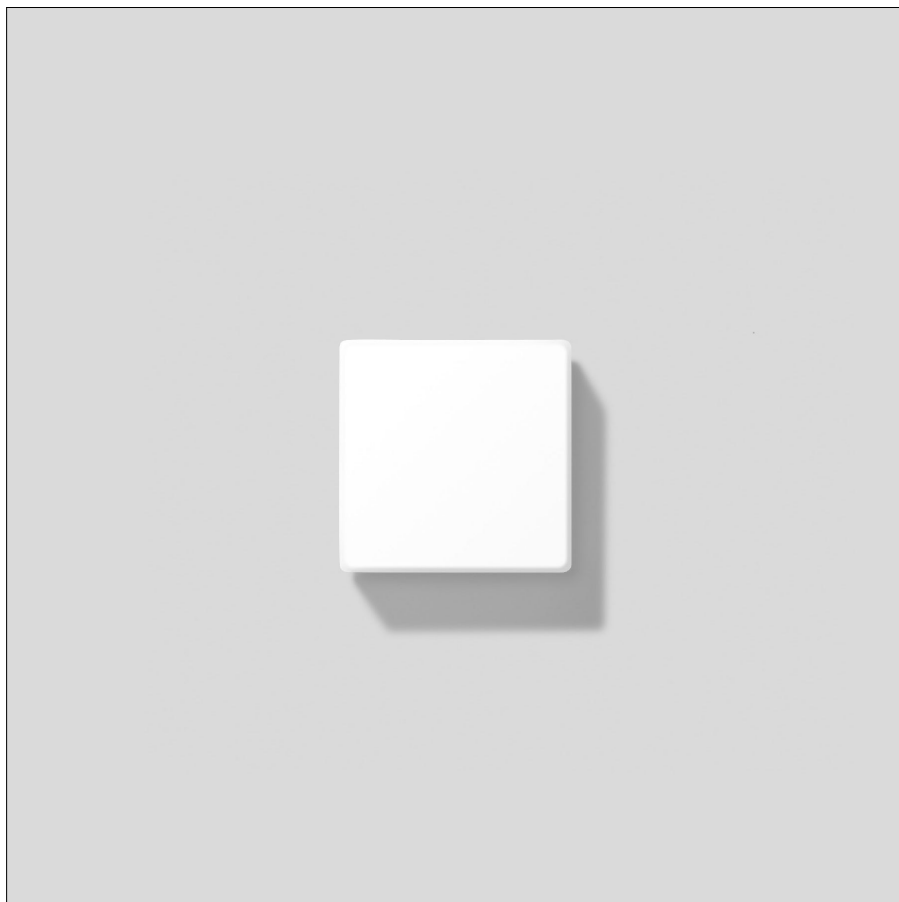
13 552 LED 4 W · 470 lm · 2700 K

13 554 LED 5 W · 470 lm · 2700 K
dimmable

13 594 LED 4 W · 470 lm · 3000 K

13 596 LED 5 W · 470 lm · 3000 K
dimmable

Please note the lamp manufacturers' operating
instructions.



Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Light distribution

