

BEGA**34 288**

Ceiling and wall luminaire for indoor use

IP 44

Project · Reference number

Date

Product data sheet**Application**

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.

Product description

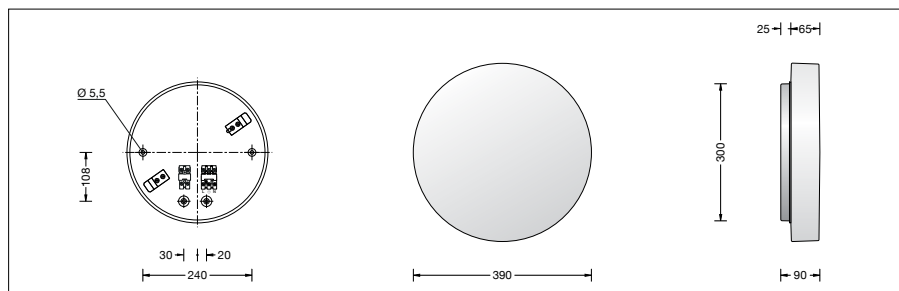
Metal housing,
finish white enamel
Hand-blown opal glass, satin matt,
with sliding-bolt closure
2 fixing holes \varnothing 5.5 mm
240 mm spacing
2 cable entries for through-wiring for mains
cable up to \varnothing 10,5 mm max. $5 \times 1.5^{\square}$
Connecting terminal 2.5^{\square}
with plug connection
Earth conductor connection
2-pole connecting terminal for
digital control
LED power supply unit
220-240 V \sim 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable
and control line
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark
Weight: 4.0 kg

Inrush current

Inrush current: 20 A / 400 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10A: 9 luminaires
B 16A: 15 luminaires
C 10A: 16 luminaires
C 16A: 25 luminaires

Lamp

Module connected wattage	25.9 W
Luminaire connected wattage	29.4 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 40^{\circ}\text{C}$

**34 288**

Module designation	LED-0570/930
Colour temperature	3000 K
Colour rendering index	$R_a > 90$
Module luminous flux	3080 lm
Luminaire luminous flux	2100 lm
Luminaire luminous efficiency	71,4 lm/W

Lifetime of the LED

Ambient temperature $t_a = 15^{\circ}\text{C}$
 – at 50,000 h: L80 B10
 – at 271,000 h: L70 B50
 Ambient temperature $t_a = 25^{\circ}\text{C}$
 – at 50,000 h: L90 B50
 – at 148,000 h: L70 B50

Article No. 34 288

LED colour temperature optionally 3000 K
or 4000 K
3000 K – Article number
4000 K – Article number + **K4**

If the article number is followed by a **P**, we can also supply these luminaires in impact-resistant synthetic material.

34 288 K4

Module designation	LED-0570/940	max. ambient temperature $t_a = 40^{\circ}\text{C}$
Colour temperature	4000 K	– at 50,000 h: L70 B50
Colour rendering index	$R_a > 90$	– at 64,000 h: L70 B50
Module luminous flux	3190 lm	
Luminaire luminous flux	2175 lm	
Luminaire luminous efficiency	74 lm/W	