
Product data sheet Ceiling and wall luminaire IP 44 34 786 Project · Reference number Date Application Ceiling and wall luminaire made of housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class. Product or policipals, satin matt 2 fixing holes o 5 mm 390 mm spacing 1 cable entry for mains supply cable 1 potential 2.5 ¹⁵ Connecting terminal 2.5 ¹⁵ Earth conductor connection Lampholder E 27 Safety class I Protection class IP 44 Protecti				GLASHÜTTE LIMBURG
Application Celling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class. Product description Luminaire made of aluminium alloy and stainless steel, finish white ename! Hand-blown opal glass, satin matt 2 fixing holes of 5 mm 290 mm spacing 1 cable entry for mains supply cable up to a 10.5 mm max. 3 x 1.5° Concenting terminal 2.5° Earth conductor connection Lampholder E 27 Safety class I Protection class IP 44 Protected against granular foreign bodies > 1 mm and splash water C – Conformity mark Weight: 1.8 kg	Product data sheet	Ceiling and wall luminaire	IP 44	34 786
Ceiling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class. Product description Luminaire made of aluminium alloy and stainless steel, finish white enamel Hand-blown opal glass, satin matt 2 fixing holes a 5 mm 290 mm spacing 1 cable entry for mains supply cable up to a 10.5 mm max. 3 x 1.5 ⁰ Connecting terminal 2.5 ⁰ Earth conductor connection Lampholder E 27 Safety class I Protection class IP 44 Protected against granular foreign bodies > 1 mm and splash water C € - Conformity mark Weight: 1.8 kg	Project · Reference number		Date	
www.gidshidette-limburg.com	Ceiling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class. Product description Luminaire made of aluminium alloy and stainless steel, finish white enamel Hand-blown opal glass, satin matt 2 fixing holes $o 5 \text{ mm}$ 290 mm spacing 1 cable entry for mains supply cable up to $o 10.5 \text{ mm max}$. $3 \times 1.5^{\circ}$ Connecting terminal 2.5° Earth conductor connection Lampholder E 27 Safety class I Protection class IP 44 Protected against granular foreign bodies > 1 mm and splash water C € – Conformity mark			www.glashuette-limburg.com

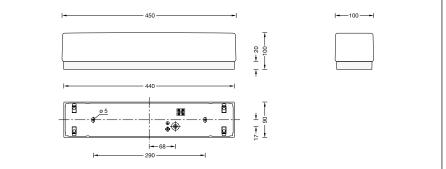

Lamp

Luminaire with lampholder E 27 Lamp wattage max. 3 x 40 W

3 High voltage tungsten halogen lamps QA 55 \cdot E 27

Osram: Halogen Eco Classic A 30 W 405 lm Philips: Eco Classic A 28 W 370 lm

Please note the lamp manufacturers' operating instructions.