

BEGA**50 036 P**

Ceiling and wall luminaire for indoor use



Project · Reference number

Date

Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.

Product description

Metal housing,
finish white enamel
Hand-blown opal glass, satin matt,
with bayonet closure
2 mounting holes \varnothing 5.5 mm
Distance apart 230 mm
2 cable entries for through-wiring for mains
cable up to \varnothing 10,5 mm max. $5 \times 1.5^{\square}$
Connection terminal 2.5^{\square}
Earth conductor connection
LED power supply unit
220-240 V \sim 0/50-60 Hz
DALI controllable
A basic isolation exists between power cable
and control line
Safety class I
 – Safety mark
 – Conformity mark

Inrush current

Inrush current: 20 A / 400 μ s
Maximum number of luminaires of this
type per miniature circuit breaker:
B 10A: 9 luminaires
B 16A: 15 luminaires
C 10A: 16 luminaires
C 16A: 25 luminaires

Lamp

Module connected wattage 26.9 W
Luminaire connected wattage 30 W
Rated temperature $t_a = 25$ °C
Ambient temperature $t_{a \max} = 45$ °C

50 036 P K3

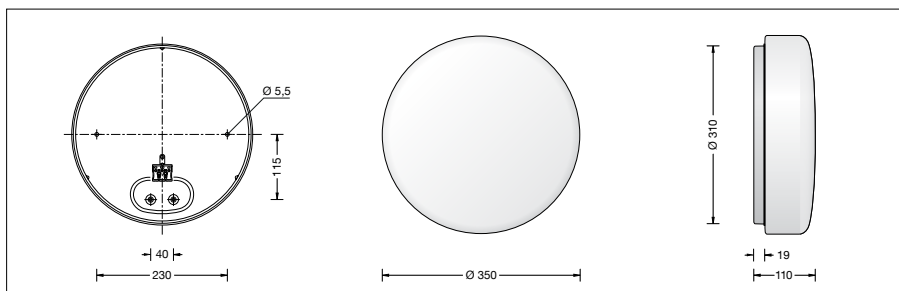
Colour temperature 3000 K
Colour rendering index CRI > 90
Module luminous flux 3385 lm
Luminaire luminous flux 2885 lm
Luminaire luminous efficiency 96,2 lm/W

50 036 P K2

Colour temperature 2700 K
Colour rendering index CRI > 90
Module luminous flux 3360 lm
Luminaire luminous flux 2863 lm
Luminaire luminous efficiency 95,4 lm/W

50 036 P K4

Colour temperature 4000 K
Colour rendering index CRI > 90
Module luminous flux 3510 lm
Luminaire luminous flux 2990 lm
Luminaire luminous efficiency 99,7 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25$ °C
– at 171,000h: L70 B50

max. ambient temperature $t_a = 45$ °C
– at 56,000h: L70 B50

Light technique

Luminaire data for the light planning program
DIALux for outdoor lighting, street lighting and
indoor lighting as well as luminaire data in
EULUMDAT- and IES-format you will find on the
BEGA web page www.bega.com.

Article No. 50 036 P

LED colour temperature optionally 2700 K,
3000 K or 4000 K
2700 K – Article number + **K2**
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Accessory · Trim rings

For this luminaire metal trim rings in 3 enamel
surfaces are optional available.
Trim rings are accessories and must be ordered
separately.

Finish enamel **white**
Finish enamel **palladium**
Finish enamel **glossy silver**

Part. No
13 004
13 005
13 006