

BEGA**50 040 P**

Ceiling and wall luminaire for indoor use

Project · Reference number

Date

Product data sheet**Application**

Ceiling and wall luminaire · indoor luminaire made of impact resistant synthetic diffuser and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required.
Luminaire with motion sensor.

Product description

Metal housing,
finish white enamel
Impact resistant synthetic diffuser, white, with bayonet closure
Integrated HF-motion sensor, maximum range 10 m
2 mounting holes \varnothing 5.5 mm
Distance apart 180 mm
2 cable entries for through-wiring for mains cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connection terminal 2.5^{\square}
Earth conductor connection
LED power supply unit
230 V \sim 50 Hz
Safety class I
CE – Conformity mark
Weight: 1.1 kg

Lamp

Module connected wattage	11.9 W
Luminaire connected wattage	17.1 W
Rated temperature	$t_a = 25^{\circ}\text{C}$
Ambient temperature	$t_{a\text{max}} = 30^{\circ}\text{C}$

50 040 P K3

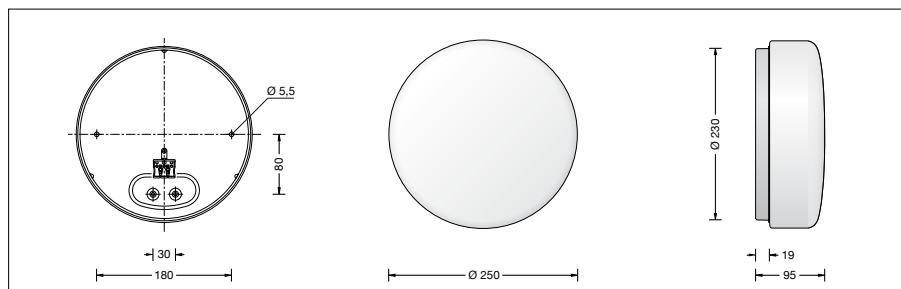
Colour temperature	3000 K
Colour rendering index	CRI > 90
Module luminous flux	1515 lm
Luminaire luminous flux	1239 lm
Luminaire luminous efficiency	72,5 lm/W

50 040 P K2

Colour temperature	2700 K
Colour rendering index	CRI > 90
Module luminous flux	1505 lm
Luminaire luminous flux	1230 lm
Luminaire luminous efficiency	71,9 lm/W

50 040 P K4

Colour temperature	4000 K
Colour rendering index	CRI > 90
Module luminous flux	1570 lm
Luminaire luminous flux	1284 lm
Luminaire luminous efficiency	75,1 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25^{\circ}\text{C}$
– at 181,000h: L70B50
max. ambient temperature $t_a = 30^{\circ}\text{C}$
– at 102,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 50 040 P

LED colour temperature optionally 2700 K, 3000 K or 4000 K
2700 K – Article number + **K2**
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Accessory · Trim rings

For this luminaire metal trim rings in 3 enamel surfaces are optional available. Trim rings are accessories and must be ordered separately.

Item	Part. No
Finish enamel white	13001
Finish enamel palladium	13002
Finish enamel glossy silver	13003