

BEGA**50 046 P**

Ceiling and wall luminaire for indoor use

Project · Reference number

Date

Product data sheet

Application

Ceiling and wall luminaire · indoor luminaire made of impact resistant synthetic diffuser and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with HF-motion sensor and group module (Master).

Product description

Metal housing,
finish white enamel
Impact resistant synthetic diffuser, white,
with bayonet closure
Integrated HF-motion sensor,
maximum range 10 m
Integrated group module,
maximum range 30 m
2 mounting holes \varnothing 5.5 mm
Distance apart 230 mm
2 cable entries for through-wiring for mains
cable up to \varnothing 10.5 mm max. $3 \times 1.5^{\square}$
Connection terminal 2.5^{\square}
Earth conductor connection
LED power supply unit
230 V \sim 50 Hz
Safety class I
CE – Conformity mark

Lamp

Module connected wattage 26.9 W
Luminaire connected wattage 32.2 W
Rated temperature $t_a = 25^{\circ}\text{C}$
Ambient temperature $t_{a\text{max}} = 30^{\circ}\text{C}$

50 046 P K3

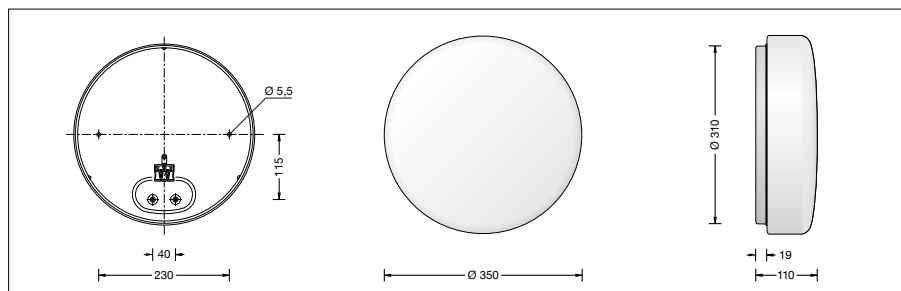
Colour temperature 3000 K
Colour rendering index CRI > 90
Module luminous flux 3385 lm
Luminaire luminous flux 2885 lm
Luminaire luminous efficiency 89,6 lm/W

50 046 P K2

Colour temperature 2700 K
Colour rendering index CRI > 90
Module luminous flux 3360 lm
Luminaire luminous flux 2863 lm
Luminaire luminous efficiency 88,9 lm/W

50 046 P K4

Colour temperature 4000 K
Colour rendering index CRI > 90
Module luminous flux 3510 lm
Luminaire luminous flux 2990 lm
Luminaire luminous efficiency 92,9 lm/W

**Service life of the LED**

Ambient temperature $t_a = 25^{\circ}\text{C}$
– at 110,000h: L70B50

max. ambient temperature $t_a = 30^{\circ}\text{C}$
– at 83,000h: L70B50

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

Article No. 50 046 P

LED colour temperature optionally 2700 K, 3000 K or 4000 K
2700 K – Article number + **K2**
3000 K – Article number + **K3**
4000 K – Article number + **K4**

Accessory · Trim rings

For this luminaire metal trim rings in 3 enamel surfaces are optional available. Trim rings are accessories and must be ordered separately.

Part. No
Finish enamel **white** **13 004**
Finish enamel **palladium** **13 005**
Finish enamel **glossy silver** **13 006**