

GLASHÜTTE LIMBURG**Product data sheet****Ceiling and wall luminaire****IP 44****50 109**

Project · Reference number

Date

Application

Ceiling and wall luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks in interior applications.

They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Metal housing,

finish white enamel

Hand-blown opal glass, satin matt, with sliding-bolt closure

2 fixing holes \varnothing 4.5 mm

190 mm spacing

2 cable entries for through-wiring for mains

cable up to \varnothing 10.5 mm max. 3×1.5

Connecting terminal 2.5

Earth conductor connection

Lampholder GX 24 q-3

Electronic ballast (EEI=A2)

220-240 V \sim 0/50-60 Hz

DC 176-264 V

DC Start \geq 198 V

Safety class I

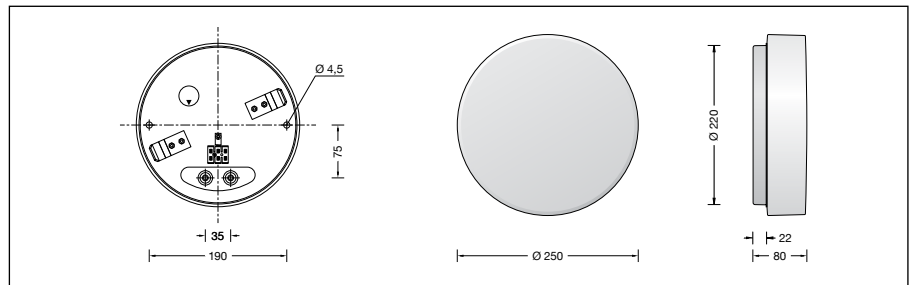
Protection class IP 44

Protected against granular foreign bodies

> 1 mm and splash water

CE – Conformity mark

Weight: 1.4 kg

**Lamp**

Compact fluorescent lamp
TC-TELI 26 W · GX 24 q-3

Osram: Dulux T/E Plus 26 W / ... 1800 lm
Philips: PL-T TOP 26 W / 4p 1800 lm

Please note the lamp manufacturers' operating instructions.

Accessory · Trim rings

For this luminaire metal trim rings in 3 surfaces are optional available. Trim rings are accessories and must be ordered separately.

Item	Part. No
Enamel white	13 076
Stainless steel	13 077
Chrome	13 078