

BEGA**50 111**

Ceiling and wall luminaire for indoor use

IP 44

Project · Reference number

Date

Product data sheet

Application


Ceiling and wall luminaire · indoor luminaire made of hand-blown opal glass, satin matt and metal housing, for all lighting tasks. They are ideal for places where a soft and uniform lighting distribution is required. Luminaire with a high protection class.

Product description

Metal housing,
finish white enamel
Hand-blown opal glass, satin matt,
with sliding-bolt closure
2 mounting holes \varnothing 5.5 mm
Distance apart 280 mm
2 cable entries for through-wiring for mains
cable up to \varnothing 10.5 mm max. 3×1.5^2
Connection terminal 2.5^2
Earth conductor connection
Lampholder GX 24 q-3
Electronic ballast (EEL=A2)
220-240 V \sphericalangle 0/50-60 Hz
DC 176-280 V
DC Start \geq 198 V
Safety class I
Protection class IP 44
Protected against granular foreign bodies
> 1 mm and splash water
CE – Conformity mark
Weight: 3.9 kg

Light technique

Luminaire data for the light planning program DIALux for outdoor lighting, street lighting and indoor lighting as well as luminaire data in EULUMDAT- and IES-format you will find on the BEGA web page www.bega.com.

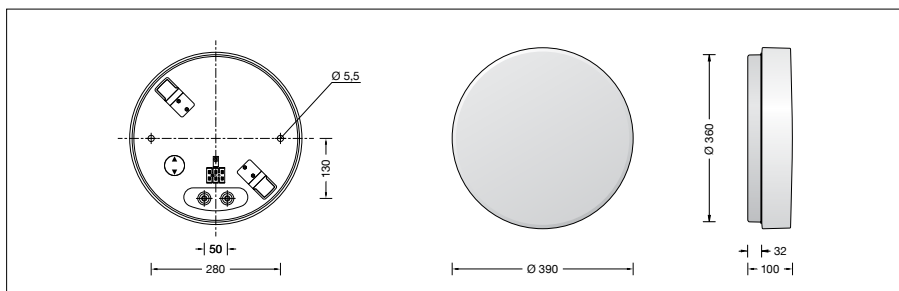

Lamps

2 Compact fluorescent lamps
TC-TELI 26 · 32 W · GX 24 q-3

Osram:

Dulux T/E ... 26 W	1800 lm
Dulux T/E ... 32 W	2400 lm

Philips:

PL-T TOP 26 W/4p	1800 lm
PL-T TOP 32 W/4p	2400 lm

Please note the lamp manufacturers' operating instructions.

Accessory · Trim rings

For this luminaire metal trim rings in 3 surfaces are optional available.

Trim rings are accessories and must be ordered separately.

Item	Part. No
Enamel white	13 082
Stainless steel	13 083
Chrome	13 084